

PRODUCT BROCHURE

IMPERIAL
FLOORING AUSTRALIA
DESIGN - SELECT - CREATE



WHOLESALE - COMMERCIAL - TRADE - RETAIL - DIY
ONLINE FLOORING PACKAGES

1300 676 176

info@imperialflooringaustralia.com.au

www.imperialflooringaustralia.com.au



SHIPPING AUSTRALIA WIDE

Shop now. Pay later.
Always interest-free.

afterpay FOLLOW US..



atfa

Australasian
Timber Flooring
Association



SHOP ONLINE | INSTORE - FLOORING PACKAGES

Imperial Flooring Australia 100% Australian Owned and Family Operated Online + Instore Flooring Store, specialising in Wholesale, Commercial, Trade, Retail & DIY Flooring Distribution & Flooring Installation Package Solutions. With our Headoffice & Designer Flooring Showroom based in Unanderra (Wollongong) and our Distribution Centres distributing flooring packages from Wollongong, Sydney & Melbourne; our range of flooring products provide you with a complete flooring installation solution for industrial, health, education, commercial, residential, etc.

Imperial Flooring Australia continue to set benchmarks for its clients providing products and services to Australia's leading construction companies through certified contractors in **Supply + Install** Packages & **Supply Only** Flooring options.

Our teams provide you the full solution of certified contractors to get your project complete on time and within your budget.

Our Product Range:

- Floor Self Levelling Compounds
- Bostik Flooring Adhesives, Floor Levelling & Flooring Accessories
- Hybrid Waterproof Flooring
- Water Resistant Laminate Flooring
- Australian Species Engineered Timber Flooring
- European Oaks Engineered Timber Flooring 14mm + 15mm + 20mm
- French Oaks Engineered Timber Flooring 14mm + 15mm + 20mm
- Herringbone Oaks Engineered Parquet Flooring
- Chevron Oaks Engineered Parquet Flooring
- Commercial Carpet Tile Flooring
- Commercial Vinyl Plank, Sheet Flooring
- Moisture Barriers / Waterproofing Membranes
- Tooling & Accessories
- Floor Primers & Concrete Repair
- Foam Underlays & Acoustic Underlays
- Pre-Fabricated Stair Nosing for All Flooring Ranges
- Trims, Scotias, C Channels, L Angles, Stair Nosing - Full range



We Ship Australia Wide!

atfa

Australasian
Timber Flooring
Association

OUR RANGE

Offering our clients a complete flooring package solution ✓



Engineered Timber Flooring
Pages 4 - 9



Herringbone
Pages 10



Chevron
Pages 11



Hybrid Waterproof Flooring
Pages 12 - 18



Laminate Flooring
Pages 19-22



Floor Adhesives
Pages 23



Floor Levelling Compounds
Pages 25 - 26



Foam & Acoustic Underlay
Page 27



Flooring Accessories
Pages 24, 28, 29, 30

+ MUCH MORE

Chat to our team for your next flooring project solutions!



14mm Oaks

SPECIFICATIONS:

Timber Grade: Natural

Dimension(mm): L1900 x W190

Thickness(mm): 14

Top Layer(mm): 2

Surface Finish: Brushed UV Lacquer

Gloss Level: 5-8% Super Matt

Nesting: Less than 25% random short boards

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size: 8 Planks / 2.888 m²

Weight: 26kg / per box


Slip Resistance: P3

Installation Methods: Floating on Underlay or Direct Glue Down


Warranty - Wear: Residential 25 Years

Warranty - Structural Commercial: By Request


Warranty Structural: Lifetime

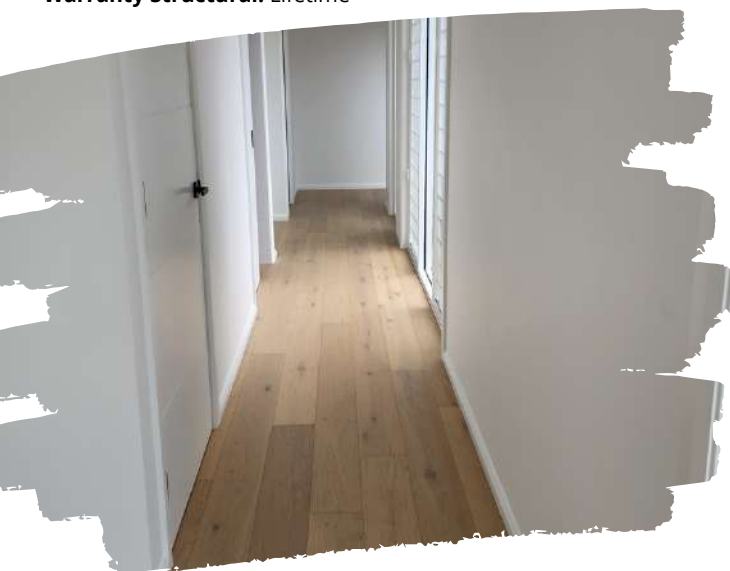


COLOUR SPECIES SELECTION




CREAM WHITE



CLASSIC OAK




HONEY BROWN



LIGHT TAN



MISTY GREY




LIME WASH




NOBLE GREY



OAK LATTE




WALNUT




VINTAGE NATURAL



CRAYON



BLACK FOREST

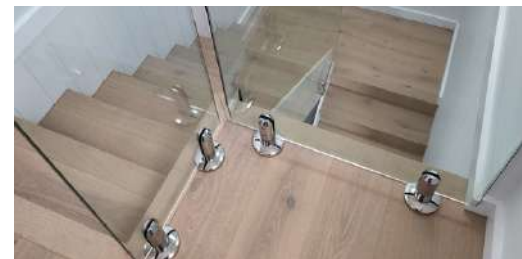

15mm Oaks

COLOUR SPECIES SELECTION

SPECIFICATIONS:

Timber Grade: Natural
Dimension(mm): L1900 x W190
Thickness(mm): 15
Top Layer(mm): 3
Surface Finish: Light Brushed Lacquer
Gloss Level: 5-8% Super Matt
Nesting: Less than 15% random short boards
Edging: 4 Sided Micro-Bevel
Joining System: Tongue and Groove
Pack Size: 8 Planks / 2.888 m²
Weight: 26kg / per box
Slip Resistance: P3
Installation Methods: Floating on Underlay or Direct Glue Down
Warranty - Wear: Residential 25 Years
Warranty - Structural Commercial: By Request
Warranty Structural: Lifetime



NATURAL LIMED



CASPER WHITE



LIGHT NEUTRAL



RAW NEUTRAL



MIDNIGHT GREY



BEIGE ASH



CORAL SAND



TINGE CLAY



SMOKED BROWN





20mm Oaks

SPECIFICATIONS:

Timber Grade: Natural
Dimension(mm): L2200 x W220
Thickness(mm): 20
Top Layer(mm): 6
Surface Finish: Light Brushed UV Lacquer
Nesting: Less than 25% Random Short Boards
Gloss Level: 5-8% Super Matt
Edging: 4 Sided Micro-Bevel
Joining System: Tongue and Groove
Pack Size: 4 x Planks / 1.936m²
Weight: 27kg / per box
Slip Resistance: P3
Installation Methods: Direct Glue Down / Floating Floor
Warranty - Wear: Residential 25 Years
Warranty - Structural Commercial: By Request
Warranty Structural: Lifetime


COLOUR SPECIES SELECTION



SMOKED BROWN



RAW NEUTRAL



LIGHT LATTE



CASPER WHITE



MOSS GREY



NATURAL LIMED



BEIGE ASH



CORAL SAND





14mm AUSTRALIAN SPECIES

AUSTRALIAN PREMIUM NATIVE COLLECTION

Eucalypt is our collection of 14mm Australian Natives consisting of Blackbutt, Spotted Gum & Tasmanian Oak. Showcasing the way nature intended, with natural character and colour that will stand out in any space. Have a unique piece of Australia in your home.

Finished with 6 coats of Bona Naturale UV lacquer enhancing the timbers raw natural appearance while still providing superior protection from day-to-day wear and boasts a 25Year Residential Surface Warranty & Lifetime Structural Warranty

The Eucalypt Collection, nature's true masterpiece. Why recreate colour and design when nature provides it. Australian native timbers with stunning grain structure, vibrant knots and colour variation. Australian timber for Australian homes.



SPECIFICATIONS

Dimensions: 1820 x 135 x 14.2mm
Wear Layer: 3mm
Core: Hevea
Grade: Lifestyle
Edge: Square
Gloss Level: Matte
Surface: Smooth
Coating: Bona Naturale UV
Profile: T&G
Pack Size m²/box: 1,4742
Weight: 24kg / per box
Board/box: 6 x planks (Nested)
Residential Warranty: 25 years
Structural Warranty: Lifetime
Commercial Warranty: On Application

COLOUR SPECIES SELECTION



SPOTTED GUM



BLACKBUTT



TASMANIAN OAK



RUSTIC SPOTTED GUM



RUSTIC BLACKBUTT

8 15mm + 20mm European - ENGINEERED TIMBER FLOORING



Luxury European Oaks

AVAILABLE SIZES:

Mezzano 15mm

- Featuring a 4mm solid oak wear layer with multi ply sub-layers. Dimensions are 190mm (Width) x 1900mm (Length) x 15mm (Thickness).

Largo 20mm

- Featuring a 6mm solid oak wear layer with multi ply sub-layers. Dimensions are 220mm (Width) x 2200mm (Length) x 20mm (Thickness).

Herringbone 15mm

- Featuring a 4mm solid oak wear layer with Russian Birch ply sub-layers. Dimensions are 90mm (Width) x 540mm (Length) x 15mm (Thickness).

Chevron 15mm

- Featuring a 4mm solid oak wear layer with Russian Birch ply sub-layers. Dimensions are 120mm (Width) x 600mm (Length) x 15mm (Thickness).
- Available in selected colours only.

Installation Methods:

- Floated on underlay for 190mm x 15mm board ONLY!
- Direct Stick (Adhesive) Fully Bonded
- Secret Nailed



Important Note on Coatings:

Gris Specie:

The Gris series is finished in UV Lacquer by WOCA of Denmark. UV Lacquer contains several layers of coating in a matt finish to produce a hard and durable floor surface. It's durable and easy to clean and maintain, compared to a UV oil finished floor, and it does not absorb water or other stains instantly.

All other European Oak Species:

All other species of European Oak is finished in natural hardwood oils by WOCA of Denmark. The use of natural oils enables the timber to breathe, regulating humidity and aiding in the prevention of warping and cupping.

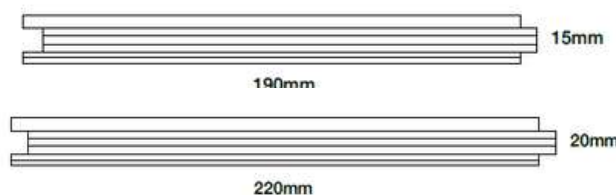

SPECIFICATIONS

Species: European Oak

Finish: WOCA UV Oil

Warranty: 25 years (structural)

Janka Hardness Rating: 6.6 kN

Moisture Content: 8-10%

Density: 0.75g/cm³

Profile: Tongue and Groove

Edge Profile: Micro-bevelled edges

Nested boards: 20%

Formaldehyde Emission: E-1

Slip testing: P3

Pack Size: 2.351m²/ctn

Weight: 28kg / per box

Stair Nosing's:


- Square Overhang
- Flush Box

Colour Shade Selections

*Being a Natural Timber Product, Variation May Occur Between Printed Timber Image and Samples



AUBER

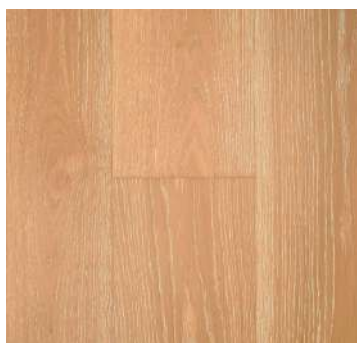

BIANCHE



BIZET



BLANC



DOZIE



ELMO



DELFT




GROELL



GRIS



RAWMA

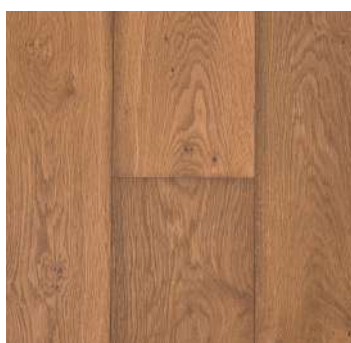

ROKEN



MERLOT



NYA

IMPERIAL
FLOORING AUSTRALIA



15mm Herringbone



SPECIFICATIONS:

Timber Grade: Prime
Dimension(mm): L600 x W120
Thickness(mm): 15
Top Layer(mm): 3
Surface Finish: Light Brushed UV Lacquer
Gloss Level: 5-8% Super Matt
Edging: 4 Sided Micro-Bevel
Joining System: Tongue and Groove
Pack Size: 16 Planks / 1.152 m²
Weight: 11kg / per box
Slip Resistance: P2
Installation Methods: Direct Glue Down Only
Warranty - Wear: Residential 20 Years
Warranty - Structural Commercial: By Request
Warranty Structural: Lifetime


COLOUR SPECIES SELECTION




RAW NEUTRAL




NATURAL LIMED



MOSS GREY




CORAL SAND




BEIGE ASH




CASPER WHITE




LIGHT NEUTRAL



SMOKED BROWN



TINGE CLAY



MIDNIGHT GREY



15mm Chevron

COLOUR SPECIES SELECTION

SPECIFICATIONS:


Timber Grade: Prime
Dimension(mm): L770 x W125
Thickness(mm): 15
Top Layer(mm): 3
Surface Finish: Light Brushed UV Lacquer
Gloss Level: 5-8% Super Matt
Edging: 4 Sided Micro-Bevel
Joining System: Tongue and Groove
Pack Size: 16 Planks / 1.54m²
Weight: 14.5kg / per box
Slip Resistance: P2
Installation Methods: Direct Glue Down Only
Warranty - Wear: Residential 20 Years
Warranty - Structural Commercial: By Request
Warranty Structural: Lifetime



SMOKED BROWN



RAW NEUTRAL




MOSS GREY



NATURAL LIMED



CORAL SAND



BEIGE ASH





1820mm x 225mm x 9.7mm - Floating Floor - 100% Waterproof

COLOUR SHADE SELECTIONS

SPECIFICATIONS:

Type: Engineered Hybrid Floating Floors

Dimension(mm): 1820mm x 225mm

Thickness(mm): 9.7mm

Wear Layer (mm): 0.7mm

Backing: 2mm Underlay

Gloss Level: Matte

Profile: Micro-Bevel

Joining System: 5G Click

Pack Size: 4 Planks / 1.638 m²

Weight: 24kg / per box

Installation Methods: Floating Floor

Warranty

Residential: 25 Years

Commercial: 15 Years

Accessories: Stair Nosing, Scotia, T-Moulding, Reducers



COASTAL BLACKBUTT



CHIFFON




DRIFTWOOD



IRON GREY



NEW ENGLAND BLACKBUTT




NEVADA



TUSCAN



SCENTED SPOTTED GUM



SEPIA



NORTHERN SPOTTED GUM

Manufactured using a proprietary 'co-extrusion' technology, Resiplank Rigid Core has the most stable and waterproof core of any flooring worldwide. A big claim which is justified by test results and the skillset of our engineers when directed to develop a waterproof, stable flooring to meet everyday needs of everyday consumers.

RIGIDCORE. 
977 Summit Collection
 Co Extrusion Technology




1800mm x 228mm x 9.0mm - Floating Floor - 100% Waterproof COLOUR SHADE SELECTIONS

SPECIFICATIONS:

Type: Engineered Hybrid Floating Flooring
Thickness: 9.0mm (2.0mm Built in Acoustic 6 star Underlay)
Width: 228mm
Length: 1800mm
Surface Finish: UV Coating- Anti bacterial
Edging: 4-Sided Micro-Bevelled Edges
Profile: 5G Click System
Installation Method: Floating
Pack Size: 1.6416m²
Weight: 24kg / per box
Boards per pack: 4 Boards
Slip Resistance: P4
Wear Layer: 0.5mm
Construction: Rigid Core; LVT balance layer; Cushion pad
Warranty: 20 years Residential + 3 Years Commercial
Structural Warranty: Lifetime
Accessories: Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



AGED OAK



FRENCH CANVAS




NEW ENGLAND
BLACKBUTT



SPOTTED GUM



WINDSOR OAK



SANDSTONE



SNOWY ASH



WARM WALNUT



LIMED GREY



Stair Nosing



T-moulding



L angle



Carpet Reducer



Scotia



Reducer



CARBON



1420mm x 225mm x 8.5mm - Floating Floor - 100% Waterproof

COLOUR SHADE SELECTIONS

SPECIFICATIONS:

Type: Engineered Hybrid Floating Floors

Dimension(mm): 1420mm x 225mm

Thickness(mm): 8.5mm

Wear Layer (mm): 0.7mm

Backing: 2mm Underlay

Gloss Level: Matte

Profile: Micro-Bevel

Joining System: 5G Click

Pack Size: 6 Planks / 1.917 m²

Weight: 24kg / per box

Installation Methods: Floating Floor

Warranty

Residential: 25 Years

Commercial: 15 Years


Accessories: Stair Nosing, Scotia, T-Moulding, Reducers



ALABASTER



COASTAL BLACKBUTT




DAPPLE GREY



FAWN



NSW SPOTTED GUM



GRANOLA



GREY STONE



ANCHOR GREY



PEWTER



NOMAD

Manufactured using a proprietary 'co-extrusion' technology, Resiplank Rigid Core has the most stable and waterproof core of any flooring worldwide. A big claim which is justified by test results and the skillset of our engineers when directed to develop a waterproof, stable flooring to meet everyday needs of everyday consumers.



1511mm x 229mm X 8.0mm - **Floating Floor - 100% Waterproof** COLOUR SHADE SELECTIONS

SPECIFICATIONS:

Type: Engineered Hybrid Floating Floors
Thickness: 6.5mm + 1.5mm acoustic backing (8.0mm overall)
Wear layer: 0.55mm
Width: 229mm
Length: 1511mm
Pack Size: 1.73m²
Weight: 23kg
Colours: 12
Install Method: 5G Valinge Lock
Finish: Matte
Edging: Micro-Bevelled Edge
Surface: UV Coating - Anti Bacterial
layer: Decorative film & Wear layer
Substrate layer: Limestone composite
Construction: Rigid Core, LVT Balance Layer; Cushion Pad
Backing layer: 1.5mm IXPE
Profile: Micro bevel
VOC Rating: A+
Slip Test Rating: R10
Warranty: 25 Years Residential + 5 Years Commercial
Accessories: Stair Nosing, Scotia, T-Moulding, Reducers



OAK SAFFRON




OAK SOFIA



BLACKBUTT



EBONY



OAK ATLANTA




OAK TITANIUM



PEARL GREY



SEASHELL WHITE



ROYAL OAK



SPOTTED GUM



WALNUT BROWN



COTTON OAK



ECO FLOORING SYSTEMS®
— SINCE 1996 —



1540mm x 182mm x 6.5mm - Floating Floor - 100% Waterproof

FEATURES

100% Waterproof.

1.5mm, 6-star attached acoustic underlay.

Embossed textured surface.

Easy to install and low maintenance.

Durable, stain and scratch resistant.

Lays over almost any pre-existing floor surface.

Subject to Wonderwood's installation guidelines and Australian standards, including appropriate expansion gaps and correct subfloor preparation.

SPECIFICATIONS:

Type: Engineered Hybrid Floating Flooring

Thickness: 6.5mm (1.5mm Built in Acoustic 6 star Underlay)

Width: 182mm

Length: 1540mm

Surface Finish: UV Coating- Anti bacterial

Edging: 4-Sided Micro-Bevelled Edges

Profile: Licensed Click System

Installation Method: Floating

Pack Size: 2.243 m2

Pack weight: 23.5 kg

Boards per pack: 8 Boards

Slip Resistance: P3

Wear Layer: 0.5mm

Construction: Rigid Core; LVT balance layer; Cushion pad

Warranty: 20 years Residential + 3 Years Commercial

Structural Warranty: Lifetime

Accessories:

- Matching Stair Nosing
- Matching Scotia
- C Channels
- Matching L Angles
- Matching T-Moulding
- Matching Reducer



Stair Nosing



T-moulding



L angle



Carpet Reducer



Scotia



Reducer

WONDERWOOD COLOUR SHADES SELECTIONS




BLACKBUTT




BONE BEIGE



COASTAL BLACKBUTT



CHARCOAL



COPELAND



FOGGY GREY



COBBLE BROWN



FLANNEL GREY



IVORY WHITE



JUNE REEF



KANDOS GREY



NEUTRAL TAN

PACIFIC SPOTTED
GUMQLD SPOTTED
GUM

WARM SMOKE



WHITE DOVE



WONDERWOOD

**WE ARE THE LARGEST STOCKISTS
OF WONDERWOOD FLOORS**

www.imperialflooringaustralia.com.au



1540mm x 228mm x 5.5mm - **Floating Floor - 100% Waterproof**

COLOUR SHADE SELECTIONS

SPECIFICATIONS:

Type: Engineered Hybrid Floating Flooring
Thickness: 5.5mm (1.5mm Built in Acoustic 6 star Underlay)
Width: 228mm
Length: 1540mm
Surface Finish: UV Coating- Anti bacterial
Edging: 4-Sided Micro-Bevelled Edges
Profile: Licenced Click System
Installation Method: Floating
Pack Size: 2.458 m2
Pack weight: 20.5 kg
Boards per pack: 7 Boards
Slip Resistance: P3
Wear Layer: 0.5mm
Construction: Rigid Core; LVT balance layer; Cushion pad
Warranty: 20 years Residential + 3 Years Commercial
Structural Warranty: Lifetime
Accessories: Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



SAND BEIGE



MISTY BROWN



CARAMEL




CLASSIC GRAY



CLASSIC SPOTTED GUM



NATURAL SPOTTED GUM



GOLDEN BLACKBUTT



NATURAL BLACKBUTT



Stair Nosing



T-moulding



L angle



Carpet Reducer



Scotia



Reducer



100% Waterproof Laminate Flooring - 10mm & 12mm

The Aquamarine is Imperial Flooring Australia's most innovative flooring design yet. Built with next generation manufacturing technology and sustainable High Density Flooring wood, the Aquamarine is a step above your usual flooring products.

Our Aquamarine flooring features a waterproof interior core, durable and sturdy structure and an aesthetic pleasing visual design. If you're looking for a great looking floor with incredible resilience and lifespan, look no further than the Aquamarine.

What Makes The Aquamarine So Resilient?

Aquamarine's superior durability and sturdiness is thanks to the next generation manufacturing technology used to build it. Not only do we use High Density Flooring wood, we also use a unique glue formulation to bring and hold everything together. Combined with rigorous testing, the Aquamarine is the most stable flooring product on the market, boasting a lifespan of over 25 years.

12mm SPECIFICATIONS:

Type: Laminate Waterproof Flooring
Dimension(mm): 2250mm (L) x 235mm (W)
Thickness(mm): 12.3mm
Wear Rating: AC4
Core: Waterproof wood based core
Gloss Level: Matte
Profile: Micro-Bevel
Joining System: Waxed drop lock
Pack Size: 4 Planks / 2.115 m²
Installation Methods: Floating Floor
Warranty

- Residential: 25 Years
- Commercial: 5 Years

Accessories: Pre-Fabrication Matching Stair Nosing's

10mm SPECIFICATIONS:

Type: Laminate Waterproof Flooring
Dimension(mm): 1515mm (L) x 237mm (W)
Thickness(mm): 10.3mm
Wear Rating: AC4
Core: Waterproof wood based core
Gloss Level: Matte
Profile: Micro-Bevel
Joining System: 2G Lock System
Pack Size: 6 Planks / 2.154 m²
Installation Methods: Floating Floor
Warranty

- Residential: 25 Years
- Commercial: 5 Years


Accessories: Pre-Fabrication Matching Stair Nosing's

12mm Colour Selections

**AYER ROCK****YARRA BAY****SPOTTED GUM****PEBBLE BAY****LAKE HILLIER****HYAMS BEACH****BLACKBUTT**

10mm Colour Selections

**SHELL COVE****TUSCAN SUN****SANDCASTLE****SEA SALT****OYSTER BAY****OCEAN ROAD****LONDON FOG****BROWN MOUNTAIN**

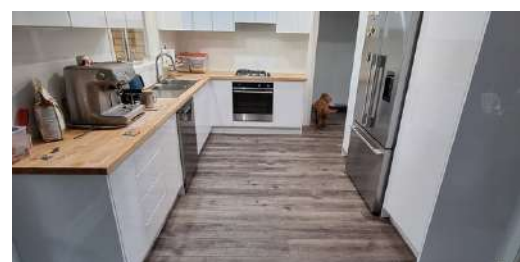

Premium Laminate **AC5** Flooring - 48hr **Water** Resistant

What is Swish Aqua laminate aqua?

This is a range of stylish laminate flooring that is to mimic natural looking decors and Australian species designs. Swish Aqua laminate is made with an eye for beauty. It is an aesthetically pleasing flooring that has been made to the highest quality. It is not only warm and aesthetic but also super and tough enough to resist scratches.

What sets it apart from the rest?

- Swish laminate aqua range is a notch above the rest of laminate flooring competing products. Here are a few reasons why it stands a cut above the rest.
- Aqua core – Swish laminate Aqua features a super low swelling HDF wood core. This makes it possible to lay the boards across room 32 meters without expansion gaps in the middle. This is a huge plus if you are flooring a large space. The floor maintains a more uniform look.
- Easy DIY installation - This flooring feature the world's best click lock systems. This locking technology makes it easier and faster to install the flooring. No glues or nails are required. It is possible to install this flooring without heavy duty tools. Your hand's fingertips are enough for most of the work
- Natural touch surface - Swish laminate aqua range also strongly resembles natural Australian wood species. The patterns are embossed for a registered real wood feel.
- Water resistant - This flooring will withstand normal household spills up to 48 hours.
- Super tough scratch resistance - The surface has an AC5 rating. It also impacts resistant meaning items can be dropped on it without denting or chipping.
- Effortless cleaning - Swish laminate aqua flooring can be cleaned quickly. It is safe to clean with soap and water
- Low maintenance and hard wearing – It does not require sanding or staining like natural wood. The Resistant surface makes this flooring suitable even for high foot traffic areas. The floor is also stain resistant making it maintain its looks even in a household with children and pets.
- Non-fading – This flooring will not require painting or staining as the covering coat does not fade easily.
- Flame resistant – This is safer to build with especially for a residential house

SPECIFICATIONS:

Type: Laminate flooring
Thickness: 12.3mm
Width: 196mm
Length: 2200mm
Edging: Micro-Bevelled Edge
Profile: Valinge 5G lock
Installation Method: Floating, glue less on top of underlay
Pack Size: 2.16 m2
Pack weight: 23 kg
Boards per pack: 5
VOC Rating: <E1
Water Resistance: 48 hour Protection
Construction: Aqua core
Abrasion Resistance: AC5 Rating
Applications: For use in interior areas of private homes and commercial establishments
Warranty: 25 years for private use , 7 years commercial use in accordance with the Swish laminate warranty terms



ECO FLOORING SYSTEMS®
 — SINCE 1996 —

SWISH AQUA COLOUR SELECTIONS**BLACKBUTT****OAK AMELIA****OAK CHELSEA****OAK OSTANA****OAK FREMONT****OAK COLONIAL****OAK PALENA****OAK NASHVILLE****OAK GEORGIA****SPOTTED GUM****OAK VERMONT****OAK SEATTLE**



Bostik Ultraset HP MS Polymer Timber Flooring Adhesive 16kg

Bostik Ultraset HP is a one part solvent and isocyanate free MS polymer based elastomeric adhesive formulated to adhere most types of timber flooring systems.

- Meets requirements for EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- Non-hazardous, solvent and isocyanate free formulation
- Very low VOC
- Non flammable
- No mixing; ready to use
- Easy to spread while maintaining stable peaks
- Will not re-emulsify when in contact with moisture
- Tested to ASTM C794 for peel adhesion to various species of Australian hardwood
- Remains flexible after full cure
- Excellent initial grab and final bond strength
- Excellent acoustic properties
- Suitable over radiant heating
- Australian made

Recommended Uses

Adhering parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete subfloors.

Adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system.

Specifications:

Colour: Brown

Viscosity: Smooth paste; holds peaks

Composition: MS Polymer

Application temperature: 5 to 30°C

Pack Sizes:

- 16kg Pail (10L)
- 600mL Sausage

Specific Gravity: 1.6 Approx.

Cure Rate: 2.5mm / 24hrs

Cure System: Moisture Cure

Full Cure: (1mm film) Approx. 18-24hrs Depending on temperature and relative humidity. Curing time extended in low humidity

Elongation: 300%

Walk on time: 16hrs – light traffic

Tack Free time: Approx. 1.25hrs @ 23°C 50% RH

Shore A Hardness: Approx. 50

Tensile Strength in Shear (2mm) Timber to Timber – BS EN 14293
1.3N/mm

Coverage: V3 Notch = 1.2-1.4m² / per litre V4 Notch = 1-1.2m² / per litre

Suitable For:

- Solid Timber
- Engineered Timber
- Parquetry
- Timber Stair Installs
- Hybrid & Laminate Stair Installs
- Plywood
- Underlay Matting
- Installing Trims



Bostik Ultraset 3in1 Acoustic Timber Flooring Adhesive 26kg

Bostik Ultraset 3 in 1 is a high performance flooring adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology is used in this formulation, maintaining the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives.

- 3 in 1 adhesive, moisture control and sound reduction membrane
- Thickness Control™ Spacer Technology maintains thickness between hardwood flooring and substrate
- Extremely low moisture vapour permeability
- Superior sound control typically outperforms 3mm rubber underlay
- 3mm Anti-fracture performance can bridge cracks up to
- Zero VOC (as calculated per SCAQMD Rule 1168)
- No restriction on board width or length
- Blockade® anti-microbial protection

Recommended Uses:

Suitable substrates include: concrete, terrazzo, ceramic tiles, timber, plywood and cement backer board- Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered flooring and bamboo flooring.

Coverage:

V4 Flat Notch (4.8mm) = 20-22m² @ 4.8mm Trowel Spread

V6 Notch Trowel (6mm) = 12-13m² @ 6mm Trowel Spread




Flooring Installation Tools & Accessories



➤ 4.8mm & 6mm
V Notch Trowels

➤ Handy Wipes - Non Scratch
Glue Removal

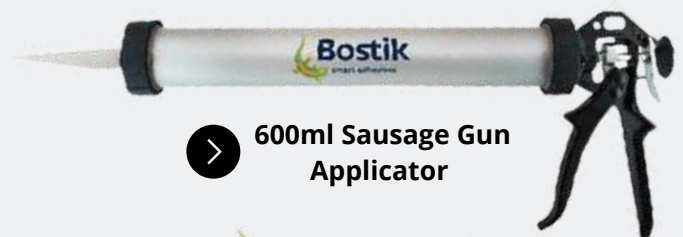

➤ 600ml Sausage Gun
Applicator





WAKOL PU280 - Moisture Barrier - 1 Component Ready to use Full Membrane

*****LAY FLOORS WITHIN THE HOUR***
SAME DAY WITH NO DELAYS !!!!!**

45 mins Dry Time

Wakol PU 280 is a ready-to-use 1-component polyurethane primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for capillary ascending humidity and higher residual humidity up to 6 CM% / 98 corresponding RH % in cement screeds without floor heating, on heated cement screeds up to max. 3 CM% / 85 corresponding RH % as well as on concrete up to max. 7,5% by weight / 98 corresponding RH %; applicable as moisture barrier on unheated cement screeds and concretes without prior moisture measurement.

- Application method: WAKOL Primer Roller, short haired velour or foam roller
- Consumption: approx. 100-150 g/m² as primer, approx. 250-350 g/m² as moisture barrier
- Drying time: approx. 40-50 minutes
- Storage: not below +5 °C, store in a cool place
- Base: polyurethane resin
- EMICODE: EC1 PLUS
- ZERO VOC - No Odour

Suitable Applications:

Porous & NON-Porous Surfaces

- Concrete
- Screed
- Timber
- Plywood
- Tiles
- Most Surfaces

Sizes Available:

- 5L Drum
- 11L Drum

Coverage:

- 1 Coat @ 150µm wet film
- 5L Consumption = 30 m²
- 11L Consumption = 70-80 m²



Bostik Dampfix Platinum Waterproof Membrane All in One Universal 15L

ALL IN ONE WATERPROOFING MEMBRANE!!!

Product overview

Dampfix® Platinum is an all-in-one, one-component rapid drying water based polyurethane, Class 3 waterproofing membrane system that meets the requirements of AS3740 by complying with AS/NZ 4858.

ABOUT DAMPFIX® PLATINUM

- All-in-one waterproofing membrane
- Class 3, high elasticity
- Fast drying - recoat in 1-2 hours @ 22°C & 50% RH. Flood test after 24 hours @ 22°C / 50% RH
- Can be tiled after 4-6 hours @ 22°C / 50% RH in non-critical areas
- Compatible for tiling with Bostik tile adhesive systems
- Excellent adhesion to concrete, rendered masonry, wet area plasterboard, FC sheet & plywood
- Can be applied to damp substrates (provided no free surface water)
- Brush or roller applied
- Designed for commercial and residential application

RECOMMENDED USES

- As a waterproofing membrane under tile to internal wet area shower, bathroom, kitchen, laundry & toilet areas when installed to AS/NZ 3740
- As a waterproofing membrane under tile or other wearing surface systems to external balconies, rooftops & podium levels when installed to AS/NZ 4654.2
- As an exposed waterproofing membrane to external applications subjected to light pedestrian traffic only
- Suitable for concrete; cement rendered masonry; FC sheeting; water resistant plasterboard; and structural plywood (Type A Stamped "PAA JAS-ANZ" to AS/NZS 2269-2004) substrates
- As a waterproofing membrane for planter boxes, retaining walls
- As a waterproofing membrane for swimming pools, covered by tiles

TECHNICAL DATA:

Colour Light Grey Appearance

Brush/roller grade smooth paste Shore "A"

Hardness Approx. 70 Elongation > 300 %

Minimum Dry Film Thickness 0.6mm (walls) to 0.9mm (floors) after 2 coats. 0.9mm minimum for pool lining.

2mm Crack Bridging Pass

Coverage 10 - 15m² after 2 coats

Volume Solids Approx. 70%

Tensile Strength ≥ 2.0 MPa

Dry Time per coat 1 -2 hours @ 22°C / 50% RH (min 2 coats)

Dry time following Trades 4-6 hours @ 22°C / 50% RH

SG Approx. 1.3 g/cm³

Membrane Rating Class 3 Australian standard AS 4654 .1 & AS/NZS 4858 Flammability Non-flammable

Packaging 15 Litre pail

Moisture Vapour Transmission Rate 1.20 grams / m² / 24hours





DL55 Indoor Floor Self Levelling Compound 20kg

Description:

DL55 is an advanced cement and polymer based levelling and smoothing compound. DL55 is formulated for experienced commercial contractors to smooth and level large commercial and retail areas. Once dry it is suitable for the application of timber flooring, vinyl, carpet and tile floor finishes. Unlike normal hydration levellers, DL55 will harden and dry at temperatures down to 10°C.

Composition:

- Super smooth – requires no sanding
- Versatile – apply **1.5mm to 75mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application

Technical Data:

Compression Strength

After 1 Day Approx. 15MPa
After 7 Days Approx. 25MPa
After 28 Days Approx. 35MPa

Tensile Bending Strength

After 1 Day Approx. 5MPa
After 7 Days Approx. 7MPa
After 28 Days Approx. 10MPa

Colour: Grey

Water / Compound Ratio: 4.4L / 20kg bag

Working Time: 20-30 minutes

Pack-size: 20kg/bag

Coverage: Covers approx. 5m² at 3mm thick



DL59 Indoor + Outdoor Floor Premium Self Levelling & Overlayment Compound 20kg

Description:

DL59 is a cement based leveling compound with very high compressive strength to C40. DL59 is especially suitable for high traffic and heavy wear locations. DL59 can be also used as overlays for polished concrete. Suitable for all floor coverings

Composition:

- Super smooth – requires no sanding
- Extremely high strength of compression and bending
- Versatile – apply **1.5mm to 40mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application
- Can be polished
- Can add colours & aggregate to mix

Technical Data:

Compression Strength

After 1 day approx. 15MPa
After 7 days approx. 25MPa
After 28 days approx. 40MPa

Tensile Bending Strength

After 1 day approx. 5MPa
After 7 days approx. 7MPa
After 28 days approx. 10MPa

Colour: Grey

Water / Compound Ratio: 4.0L / 20kg Bag

Working Time: 20-30 minutes

Pack-size: 20kg/bag

Coverage: Covers approx. 5m² at 3mm thick



DP70 Universal Porous & Non Porous Primer 5kg + 20kg Drums

Description:

Cemimax DP70 is a low emission, multi-purpose dispersion primer for for existing surfaces on **indoor & outdoor** applications. Use on surfaces with well-bonded, waterproof adhesive and smoothing compound residues.

Technical Data:

Packaging: Plastic bucket

Pack size:

- 5kg / 4L
- 20kg / 16L

Shelf-life: 12 months

Touch Dry Time: 15 -20min

Coverage: Approx. 12m² /1 Litre

Drying time: 4-6 hours

Suitable for CONCRETE, TIMBER, TILES, PLYWOOD, SLATE + more





Bostik Ultra Level Pro C500 Floor Levelling Compound 20kg

Description:

- Accepts foot traffic in 2 - 3 hours
- Single component, just add water
- Very fast application, single operation
- Dimensionally stable
- Rapid curing
- Receives vinyl & timber after 16 hours, carpet & tile after 6 - 8 hours
- Can be applied directly onto prepared concrete surfaces

Recommended Uses:

- Superior underlay for vinyl & timber floor coverings (may be used under carpet & tile if quick covering time is required)
- Reinstatement of new or existing concrete floors subject to foot traffic, industrial equipment, and fork lift traffic or trolleys.
- Residential, commercial and industrial applications,
- Heavy industrial traffic
- Wet areas (not immersed)
- With under subfloor heating

Technical Data:

Colour: Grey

Package: 20kg Bag

Ready for foot traffic: 2 - 3 hours

Ready for floor coverings: 6 - 8 hours

Water Ratio: 4.5L - 4.8L water mix / per bag

Coverage: Approx 1mm thick @ 12-15 sqm's area

Age Compressive Strength

5 hours: 7 - 10 MPa

1 day: 15 - 20 MPa

7 days: 20 - 25 MPa

28 days: ≥ 35 MPa



Bostik MULTIPRIME Porous Floor Primer 5L & 20L Drums

Technical Data:

Packaging: Plastic bucket

Pack size:

- 5 Litre Drum
- 20 Litre Drum

Shelf-life: 12 months

Dry Time: Approx 30mins

Coverage: Approx. 16m² /per 1 Litre

Mixing Ratio: 1:1 with Water

Suitable for CONCRETE + TIMBER + FIBRE CEMENT + HEBEL + PLASTERBOARD + RENDER



Bostik ULTRA Prime Grip NON Porous Floor Primer 7kg Drums

Technical Data:

Packaging: Plastic bucket

Pack size:

- 7kg Drum

Shelf-life: 12 months

Dry Time: Approx 30mins

Coverage: Approx. 10-12m² / per 1 Litre

Suitable for TILES + TIMBER + PAINT + WATERPROOFING + VINYL + more



TILES



CONCRETE




TIMBER



OUTDOORS



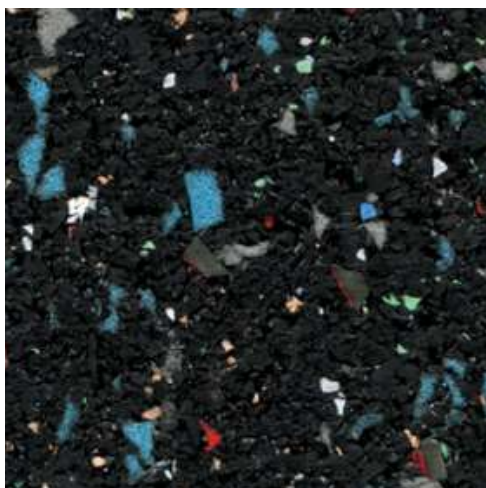

REGUPOL 5512 5mm Acoustic Rubber Matting Underlay

SPECIFICATIONS:

Type: Rubber
 Colour: Multicolour
 Surface: Granular Texture
 Roll Size: 12m² (10m x 1.25m Roll)
 Thickness: 5mm
 Width: 1.25 metres
 Weight: 45 Kgs
 Suitable Floor Coverings: Timber, Parquetry, T+G, Laminate & Engineered Flooring
 Strata Certified: Yes
 Acoustic Report: Yes
 Installation Method: Floating or Direct Dual Bond Stick (Glue)



2mm Black Acoustic Certified (2in1) Foam Underlay

SPECIFICATIONS:

Type: Foam
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm
 Thickness: 2mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 6
 Suitable Floor Coverings: Laminate & Engineered Flooring
 Strata Certified: Yes
 Acoustic Report: Yes
 Installation Method: Floating Floor ONLY



2mm Green Acoustic (2in1) Foam Underlay

SPECIFICATIONS:

Type: Acoustic Green Underlay
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm Roll
 Thickness: 2mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 4
 Suitable Floor Coverings: Laminate, Bamboo & Engineered Flooring
 Strata Certified: No
 Installation Method: Floating Floor ONLY



3mm Silver (2in1) Foam Underlay

SPECIFICATIONS:

Type: Standard Silver Foam
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm Roll
 Thickness: 3mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 4
 Suitable Floor Coverings: Laminate, Bamboo & Engineered Flooring
 Strata Certified: No
 Installation Method: Floating Floor ONLY

SUPABORD - HEAVY DUTY TEMPORARY FLOOR PROTECTION

SupaBord Heavy Duty is our premium temporary floor protection product for commercial, residential construction and renovation projects.

SupaBord Heavy Duty is the latest technology in floor protection, providing a balance of vapour permeability, durability and strength. Developed to withstand the demands of the construction industry, each roll covering 30 sqm. SupaBord Heavy Duty is flexible yet strong and made from 100% recycled material.

SupaBord Heavy Duty prevents the risk of damage and rework, saving money on material and labour costs and is the brand of choice by contractors worldwide.

DIMENSIONS:

Size: 800mm wide x 37.5m long, covers 30sqm

SUPABORD JOINT TAPE

SupaBord Joint Tape is one of two tapes in the SupaBord product range.

SupaBord Joint Tape is specifically designed to secure SupaBord Temporary Floor Protection seams together for up to 90 days. SupaBord Joint Tape is made from quality non-woven paper that is breathable and vapour permeable to promote even finishes in curing floors. The 90-day high tack contractor grade hot melt adhesive provides instant and secure attachment that is strong and flexible.

FEATURES:

- Joins SupaBord seams together for up to 90 days
- High tack contractor grade adhesive
- Strong and flexible
- Breathable
- Vapour permeable

DIMENSIONS:

Size: 60mm wide x 40m long x 0.18mm thick



SUPABORD EDGE TAPE

SupaBord Edge Tape is one of two tapes in the SupaBord product range.


SupaBord Edge Tape is specifically designed to secure SupaBord Temporary Floor Protection to floors and walls for up to 45 days. SupaBord Edge Tape is made from quality crepe paper with a natural rubber adhesive to provide instant attachment to a wide variety of surfaces.

FEATURES:

- Joins SupaBord floor protection edges to floors for up to 45 days
- Low to medium 45-day contractor grade adhesive
- Strong and flexible

DIMENSIONS:

Size: 40mm wide x 30m long x 0.12mm thick

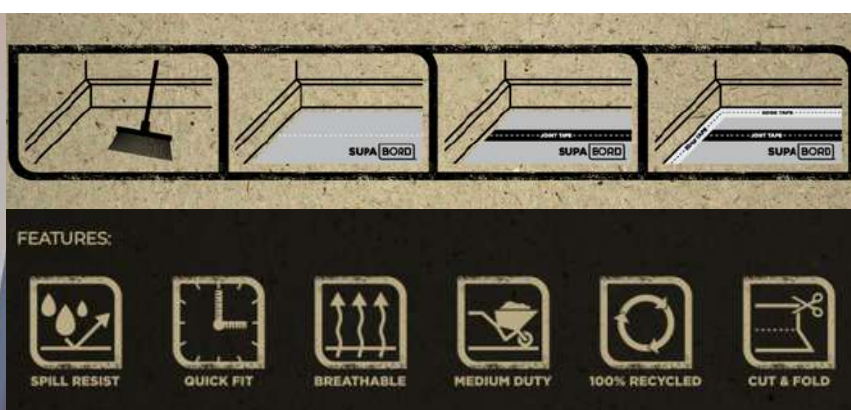




ONE STOP FLOORING STORE


WHITE NON - MARKING
MALLETSTROWELS V4 + V6
TIMBER FLOORING

SAUSAGE GUNS 600ML

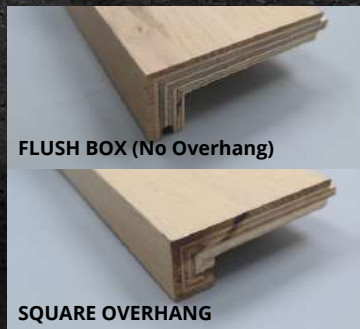CLEANING WIPES
NON-SCRATCHFLOATING FLOOR
UNDERLAYFLOORING
ADHESIVESBONA TIMBER
FLOOR CLEANERBONA LAMINATE, HYBRID
VINYL, TILE FLOOR CLEANERCOLOUR ALLUMINIUM
L ANGLE TRIMSCOLOUR ALLUMINIUM
C CHANNEL TRIMSFLOOR SCRATCH
REPAIR KITSCOLOUR
MATCHING L ANGLES
HYBRID & LAMINATE
FLOORINGCOLOUR
MATCHING SCOTIA'S
ALL RANGESPRE-FABRICATED STAIR
NOSINGS MATCHING
ENGINEERED TIMBER
FLOORINGPRE-FABRICATED STAIR
NOSINGS MATCHING
HYBRID & LAMINATE
FLOORINGCOLOUR
MATCHING T-MOULDINGS
HYBRID & LAMINATE
FLOORING+ **MUCH MORE:** LEARN MORE ONLINE**SHOP NOW:** www.imperialflooringaustralia.com.au/shop





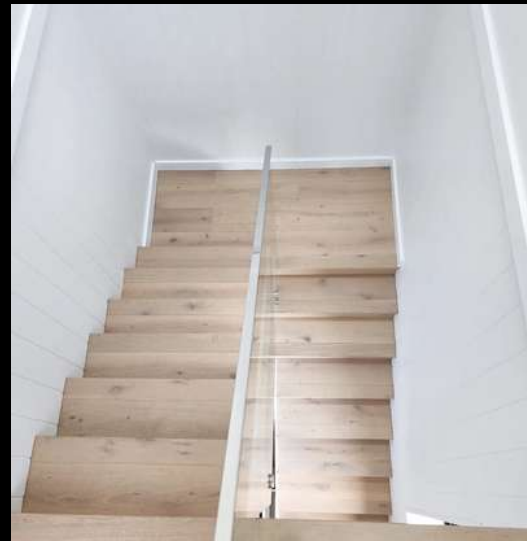





WE SHIP AUSTRALIA WIDE!!

www.imperialflooringaustralia.com.au/shop

General Inquiries

Contact: 1300 676 176

Email: info@imperialflooringaustralia.com.au



Wollongong

2/25 Investigator Drive
Unanderra NSW 2526

HEADOFFICE + SHOWROOM + WAREHOUSE



Sydney

DISTRIBUTION CENTRES



Melbourne

DISTRIBUTION CENTRES

atfa

Australasian
Timber Flooring
Association

Shop now. Pay later.
Always interest-free.

afterpay

IMPERIAL

FLOORING AUSTRALIA

WHOLESALE - COMMERCIAL - TRADE - RETAIL - DIY

FLOORING PACKAGES

www.imperialflooringaustralia.com.au