


**IMPERIAL**  
FLOORING AUSTRALIA



**PRODUCT BROCHURE**

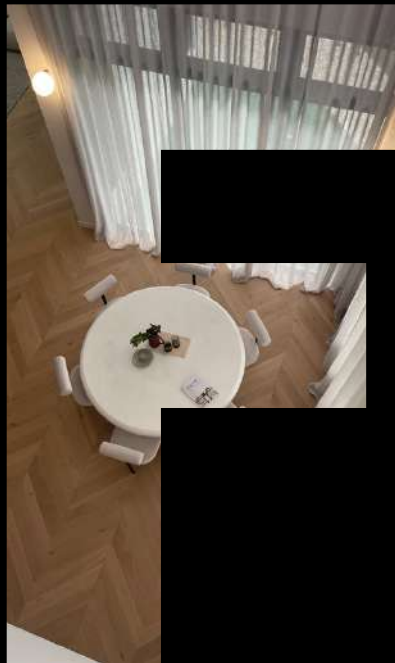

# FLOORING ONLINE | IN-STORE

## Imperial Flooring Australia: Premium Timber Flooring Solutions

Imperial Flooring Australia is an Australian family-owned business specialising in premium timber flooring for residential and commercial spaces.

With the showroom located in Unanderra and distribution centres in Wollongong, Sydney & Melbourne, we offer a range of hi-quality flooring options for nationwide shipping.

Our commitment to quality and customer service has made Imperial Flooring Australia a trusted partner for leading construction companies in Australia.

### Services and Commitment

Imperial Flooring Australia is dedicated to providing high-quality flooring products and services to residential and commercial clients across Australia.

With a commitment to customer satisfaction and budget-friendly options, Imperial Flooring Australia is a one-stop shop for In-store or online products.

Our mission is to provide tailored flooring solutions to meet all needs and preferences. Home owners, designers or tradies can begin planning projects by ordering flooring samples online at any time or anywhere. Its really that simple!

### Transform your space today!

Visit the Wollongong showroom or shop flooring online for convenient Australia-wide shipping.



***We Ship Australia Wide!***



**Australasian  
Timber Flooring  
Association**

# PRODUCT RANGE

Offering our clients a complete flooring package solution ✓



Engineered Timber Flooring  
Pages 4 - 9 + 14



Herringbone  
Pages 5 + 10 - 11



Chevron  
Pages 12 - 13



Hybrid Waterproof Flooring  
Pages 15 - 18



Laminate Flooring  
Pages 19 - 24



Foam & Acoustic Underlay  
Pages 25



Flooring Adhesives  
Pages 26



Floor Levelling Compounds  
Page 27



Flooring Accessories & Tools  
Pages 28 - 32

**+ MUCH MORE**

*Chat to our team for your next flooring project solutions!*



## 14mm Oak

Explore the beauty of 14mm Engineered Oak Timber flooring exclusively at Imperial Flooring Australia. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.


### **SPECIFICATIONS:**

**Timber Grade:** Natural - ABCD  
**Dimension(mm):** L1900 x W190  
**Thickness(mm):** 14  
**Top Layer(mm):** 2  
**Surface Finish:** Brushed UV Lacquer  
**Gloss Level:** 5-8% Super Matt  
**Nesting:** Less than 25% random short boards  
**Edging:** 4 Sided Micro-Bevel  
**Joining System:** Tongue and Groove  
**Pack Size:** 8 Planks / 2.888 m<sup>2</sup>  
**Weight:** 26kg / per box  
**Slip Resistance:** P3  
**Installation Methods:** Floating on Underlay or Direct Glue Down  
**Warranty:**


- Residential: 20 Years
- Commercial: By Request

**Warranty Structural:** Lifetime

### COLOUR SPECIES SELECTION




NATURAL OAK




TUSCAN OAK



WHITE HAVEN



CREAM WHITE



COUNTRY OAK



LIGHT BROWN



PALE OAK



CEDAR BROWN



BLACK OPAL



SQUARE OVERHANG



FLUSH 90 DEGREE

### STAIR NOSING PROFILES



## 15mm Oak

Explore our premium 15mm Engineered Oak Timber flooring exclusively at Imperial Flooring Australia. Perfect for residential & commercial spaces Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

### **SPECIFICATIONS:**

- Timber Grade:** Natural - ABCD
- Dimension(mm):** L1900 x W190
- Thickness(mm):** 15
- Top Layer(mm):** 3
- Surface Finish:** Light Brushed Lacquer
- Gloss Level:** 5-8% Super Matt
- Nesting:** Less than 15% random short boards
- Edging:** 4 Sided Micro-Bevel
- Joining System:** Tongue and Groove
- Pack Size:** 8 Planks / 2.888 m<sup>2</sup>
- Weight:** 26kg / per box
- Slip Resistance:** P3
- Installation Methods:** Floating on Underlay or Direct Glue Down
- Warranty:**
  - Residential: 20 Years
  - Commercial: By Request
- Warranty Structural:** Lifetime

### COLOUR SPECIES SELECTION




LIGHT NATURAL




WHITE WASH



NEUTRAL OAK



RAW OAK



TINGE OAK



GOLDEN OAK



SANDY BAY



HICKORY BROWN



CHARCOAL



# 14mm Oak

**ABC = Less knots, cleaner look**

Premium Pronto ABC Grade 14mm Engineered Oak Timber Flooring. Pronto engineered oak flooring planks are manufactured using a Hi-Spec 3mm visual grade, the wear layer is then bonded to an 11mm multi-layer plywood substrate. This trusted method of manufacturing provides a dimensionally stable and durable floor with an eye-catching aesthetic for a cleaner sharper look. Finished thickness of 14mm. Grade & Surface: Hi-Spec Visual ABC Grade, contains less knots and split defects for a cleaner looking plank.

## **SPECIFICATIONS:**

**Timber Grade:** ABC

**Dimension(mm):**

- Plank = L1900 x W190
- Herringbone = L600 x W120

**Thickness(mm):** 14

**Top Layer(mm):** 3

**Surface Finish:** Light Wire Brush

**Gloss Level:** Matt Finish

**Nesting:** Less than 25% random short boards

**Edging:** 4 Sided Micro-Bevel

**Joining System:** Tongue and Groove

**Pack Size:**

- Plank = 6 Planks / 2.166 m<sup>2</sup>
- Herringbone = 10 Panels / 0.864 m<sup>2</sup>


**Slip Resistance:** P3

**Installation Methods:** Floating on Underlay (Plank Only) or Direct Glue Down


**Warranty:**

- Residential: 20 Years
- Commercial: By Request

## PLANK COLOURS




WASHED PEBBLE




PARCHMENT



MISTY COVE




CHESTERFIELD



SEAFOAM

## HERRINGBONE COLOURS




WASHED PEBBLE



PARCHMENT



MISTY COVE



CHESTER FIELD



SEAFOAM



## 15mm Oak

If you love the look of fine oak flooring then Prestige Oak is the natural choice. Sharing the unrivalled beauty and character of traditional European Oak, Prestige Oak Flooring is a popular choice amongst leading Australian architects and designers. Design flexibility is assured with stunning extra wide planks and an extensive palette of pre-finished natural, and stained décors.

Our versatile Prestige Oak range includes a selection of widths and thicknesses for a variety of applications. Available in both traditional Tongue & Groove and the ever popular Unilin click system for fast and convenient installation. On-trend colours, scratch resistant coatings, Prestige Oak flooring ensures lifetime enjoyment.

### **SPECIFICATIONS:**

**Timber Grade:** ABCD & AB Grade

**Species:** European Oaks

**Dimension(mm):** L1900mm x W190mm

**Thickness(mm):** 15mm

**Top Layer(mm):** 4mm

**Surface Finish:** Wire Brush

**Gloss Level:** Matte

**Nesting:** 25% random short boards

**Edging:** 4 Sided Micro-Bevel

**Joining System:** Tongue and Groove & Click System

**Pack Size:** 6 Planks / 1.805 m<sup>2</sup>

**Slip Resistance:** P3

**Installation Methods:** Floating on Underlay or Direct Glue Down

**VOC:** Toxic Free Water Based Matte Coating E1

### **Warranty:**

- Residential: 20 Years
- Commercial: By Request

**Warranty Structural:** Lifetime

**Accessories:** Pre-Fabricated Stair Nosing's, Colour Matching 15mm C Channels

## COLOUR SPECIES SELECTION



PURE NATURAL



PARANA



WHITE SANDS



VANILLA




STRAW



TAN



STORM



SAUVIGNON



RIESLING



MARBLE



LATTE



LIME WASH



IRON GREY



HERITAGE GREY



GREY WASH



HB DARK BROWN



COLONIAL GREY



CHESTNUT



AVOLA NATURAL



CHATEAU GREY



## 20mm Oak

Explore the beauty of 20mm Engineered Oak Timber flooring exclusively at Imperial Flooring Australia. Perfect for residential & commercial spaces. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 20mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

### **SPECIFICATIONS:**

**Timber Grade:** Natural - ABCD

**Dimension(mm):** L2200 x W220

**Thickness(mm):** 20

**Top Layer(mm):** 6

**Surface Finish:** Light Brushed UV Lacquer

**Nesting:** Less than 25% Random Short Boards

**Gloss Level:** 5-8% Super Matt

**Edging:** 4 Sided Micro-Bevel

**Joining System:** Tongue and Groove

**Pack Size:** 4 x Planks / 1.936m<sup>2</sup>

**Weight:** 27kg / per box

**Slip Resistance:** P3

**Installation Methods:** Direct Glue Down / Floating Floor

### **Warranty:**

- Residential: 20 Years


- Commercial: By Request

**Warranty Structural:** Lifetime

### COLOUR SPECIES SELECTION



HICKORY BROWN



RAW OAK



MINK GREY



LIGHT NATURAL



WHITE WASH



GOLDEN OAK



SANDY BAY





## 21mm Oak

If you love the look of fine oak flooring then Prestige Oak is the natural choice. Sharing the unrivalled beauty and character of traditional European Oak, Prestige Oak Flooring is a popular choice amongst leading Australian architects and designers. Design flexibility is assured with stunning extra wide planks and an extensive palette of pre-finished natural, and stained décors.

Our versatile Prestige Oak range includes a selection of widths and thicknesses for a variety of applications. Available in both traditional Tongue & Groove and the ever popular Unilin click system for fast and convenient installation. On-trend colours, scratch resistant coatings, Prestige Oak flooring ensures lifetime enjoyment.

### SPECIFICATIONS:

**Timber Grade:** ABCD & AB Grade

**Species:** European Oak

**Dimension(mm):** L2200mm x W220mm

**Thickness(mm):** 21mm

**Top Layer(mm):** 6mm

**Surface Finish:** Wire Brush

**Gloss Level:** Matte

**Nesting:** 25% random short boards

**Edging:** 4 Sided Micro-Bevel

**Joining System:** Tongue and Groove & Click System

**Pack Size:** 6 Planks / 1.936 m<sup>2</sup>

**Slip Resistance:** P3

**Installation Methods:** Floating on Underlay or Direct Glue Down

**VOC:** Toxic Free Water Based Matte Coating E1

**Warranty:**

- Residential: 20 Years
- Commercial: By Request

**Warranty Structural:** Lifetime

**Accessories:** Pre-Fabricated Stair Nosing's, Colour Matching 15mm C Channels

### COLOUR SPECIES SELECTION



GRIGIO



PARANA




GLACIER



MARBLE




RAW



CREMA



CANNES



CHAMPAGNE



CHARDONNAY



SEMILLION



STRAW



TOKAY




GREY MIST




DOVER GREY



BEACH DRIFTWOOD



AGED OAK



LATTE



SLATE



MERLOT



BLACK FOX



## 15mm Herringbone

Discover the timeless elegance of our 15mm Herringbone Parquet Engineered Oak Timber flooring exclusively at Imperial Flooring Australia. Perfect for residential & commercial spaces. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

### **SPECIFICATIONS:**

**Timber Grade:** Prime - ABC

**Dimension(mm):** L600 x W120

**Thickness(mm):** 15

**Top Layer(mm):** 3

**Surface Finish:** Light Brushed UV Lacquer

**Gloss Level:** 5-8% Super Matt

**Edging:** 4 Sided Micro-Bevel

**Joining System:** Tongue and Groove

**Pack Size:** 16 Planks / 1.152 m<sup>2</sup>

**Weight:** 11kg / per box

**Slip Resistance:** P3

**Installation Methods:** Direct Glue Down Only

**Warranty:**

- Residential: 20 Years
- Commercial: By Request

**Warranty Structural:** Lifetime

## COLOUR SPECIES SELECTION



RAW OAK



LIGHT NATURAL



MINK GREY



SANDY BAY



GOLDEN OAK



WHITE WASH




NEUTRAL OAK



HICKORY BROWN



TINGE OAK



CHARCOAL



15mm/3 & 21mm/6

## Herringbone

For centuries, classic residencies and spectacular chateaus have all featured the unique beauty of Oak parquetry. Parquetry formations provide these structures unique character and appeal that has truly stood the test of time. Our De Marqué Parquetry Collection draws on this design cue, featuring Herringbone and Chevron patterns for everyday living. A classic and contemporary palette of pre-finished colours provides wonderful warmth and charm to almost any interior

### **SPECIFICATIONS:**

**Timber Grade:** ABCD

**Dimension(mm):** 600mm x 120mm

**Thickness(mm):** 15mm & 21mm

**Top layer(mm):**

- 15mm = 4mm Veneer
- 21mm = 6mm Veneer

**Surface Finish:** Light Brushed Surface

**Gloss Level:** Matte Finish

**Edging:** Micro-Bevel

**Joining System:** Tongue and Groove

**Pack Size:**

- 15mm = 0.720m<sup>2</sup> / Ctn, 8kgs
- 21mm = 0.576m<sup>2</sup> / Ctn, 8kgs


**Slip Resistance:** P3

**Installation Methods:** Direct Glue Down Only

**Warranty:**

- Residential = 20 years
- Commercial = 5 years


## COLOUR SPECIES SELECTION




PURE NATURAL




PARANA




VINTAGE




STORM




SAUVIGNON




RIESLING




RAW




LATTE




COLONIAL GREY




DARK BROWN




CHATEAU GREY




COGNAC



ASH GREY



CABERNET

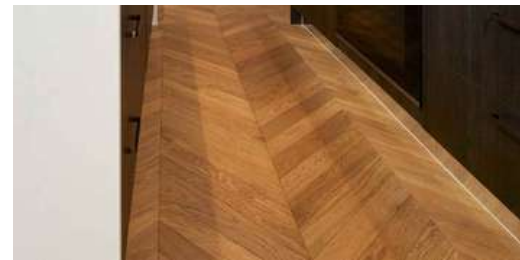

15mm/3 &amp; 21mm/6

## Chevron

For centuries, classic residencies and spectacular chateaus have all featured the unique beauty of Oak parquetry. Parquetry formations provide these structures unique character and appeal that has truly stood the test of time. Our De Marqué Parquetry Collection draws on this design cue, featuring Herringbone and Chevron patterns for everyday living. A classic and contemporary palette of pre-finished colours provides wonderful warmth and charm to almost any interior

### **SPECIFICATIONS:**

**Timber Grade:** ABCD

**Dimension(mm):**

- 15mm = 600mm x 120mm
- 21mm = 600mm x 90mm

**Thickness(mm):** 15mm & 21mm

**Top layer(mm):**

- 15mm = 4mm Veneer
- 21mm = 6mm Veneer

**Surface Finish:** Light Brushed Surface

**Gloss Level:** Matte Finish

**Edging:** Square Edge

**Joining System:** Tongue and Groove

**Pack Size:**

- 15mm = 0.720m<sup>2</sup> / Ctn, 8kgs
- 21mm = 0.432m<sup>2</sup> / Ctn, 6Kgs

**Slip Resistance:** P3

**Installation Methods:** Direct Glue Down Only

**Warranty:**

- Residential = 20 years
- Commercial = 5 years

## COLOUR SPECIES SELECTION



PURE NATURAL



PARANA



VINTAGE



STORM



SAUVIGNON



RIESLING




RAW



LATTE



COLONIAL GREY



DARK BROWN



CHATEAU GREY



COGNAC



## 15mm Chevron

Explore the timeless elegance of our 15mm Chevron Parquetry Engineered Oak Timber flooring exclusively at Imperial Flooring Australia. Perfect for residential & commercial spaces. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

### **SPECIFICATIONS:**

- Timber Grade:** Prime - ABC
- Dimension(mm):** L770 x W125
- Thickness(mm):** 15
- Top Layer(mm):** 3
- Surface Finish:** Light Brushed UV Lacquer
- Gloss Level:** 5-8% Super Matt
- Edging:** 4 Sided Micro-Bevel
- Joining System:** Tongue and Groove
- Pack Size:** 16 Planks / 1.54m<sup>2</sup>
- Weight:** 14.5kg / per box
- Slip Resistance:** P2
- Installation Methods:** Direct Glue Down Only
- Warranty:**
  - Residential: 20 Years
  - Commercial: By Request
- Warranty Structural:** Lifetime


## COLOUR SPECIES SELECTION



HICKORY BROWN




RAW OAK



MINK GREY



LIGHT NATURAL



SANDY BAY



GOLDEN OAK



## AUSTRALIAN HARDWOOD

### AUSTRALIAN PREMIUM NATIVE COLLECTION

*FIDDLEBACK AUSTRALIAN ENGINEERED TIMBER FLOORING*

Introducing our unique Fiddleback Engineered Australian Hardwood collection. It's available in the ever popular Spotted Gum and Blackbutt. Fiddleback wear layers combine the classic features of our Australian Eucalyptus bonded onto an ever reliable Plywood core. This creates an authentic Australian timber visual with the associated stability and durability of an engineered timber construction

#### Variety Of Sizes

Surface finishes include smooth or brushed textures. Pre-finished matte, water based multi-coat PU lacquer. All sizes display Micro-bevel 4 sides to enhance the plank visual. The Fiddleback plank sizes are recommended as a floating installation and Direct Fix only for parquetry.

#### Key Features


- Extremely stable with excellent wear resistance
- Spotted Gum Janka 11 kN
- Impact resistant, durable and stable
- Blackbutt Janka 9.1 kN

#### Profile

- Patented Click format for floating installation & direct stick.
- T&G for Herringbone & Rustic. Micro Bevelled edges, 4 sides.
- Coating & Surface - Direct Stick Installations
- Smooth & light wire brushed, PU lacquer matte, approx. 10-15% gloss level in both brushed and smooth surface.




## COLOUR SPECIES SELECTION



Herringbone  
SPOTTED GUM




Herringbone  
BLACKBUTT




Available in  
Rustic Grade

125mm  
SPOTTED GUM




Available in  
Rustic Grade

125mm  
BLACKBUTT



Available in  
Rustic Grade

180mm / 189mm  
SPOTTED GUM



Available in  
Rustic Grade

180mm / 189mm  
BLACKBUTT



## 9mm Hybrid

### COLOUR SHADE SELECTION

#### **SPECIFICATIONS:**

- Type:** Hybrid Floating Flooring
- Thickness:** 9mm  
*(2mm Built in Acoustic 6 star Underlay)*
- Width:** 228mm
- Length:** 1800mm
- Surface Finish:** UV Coating- Anti bacterial - Scratch Armor
- Edging:** Square Edge
- Profile:** Patented 5G Click System
- Waterproof:** 100%
- Installation Method:** Floating Floor
- Pack Size:** 1.6416m<sup>2</sup>
- Weight:** 24kg / per box
- Boards per pack:** 4 Boards
- Slip Resistance:** P4
- Wear Layer:** 0.5mm
- Construction:** PVC Embossed Wear Layer with Limestone & PVC Composite Core
- VOC Rating:** E1
- Warranty:** 20 years Residential + Commercial on request
- Structural Warranty:** Lifetime
- Accessories:** Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



LIGHT OAK




BONDI SANDS



NEW ENGLAND BLACKBUTT



SPOTTED GUM




BEACH OAK



LIGHT BEIGE



WHITE BAY



WARM BROWN



ASH GREY



SHADOW GREY



STAIN  
GUARD



EASY TO  
CLEAN



DURABLE



SCRATCH  
SAFE





## 8mm Hybrid

### COLOUR SHADE SELECTION

#### SPECIFICATIONS:


- Type:** Hybrid Floating Flooring
- Thickness:** 8mm  
*(2mm Built in Acoustic 5 star Underlay)*
- Width:** 230mm
- Length:** 1500mm
- Surface Finish:** UV Coating- Anti bacterial - Scratch Armor
- Edging:** Square Edge
- Profile:** 2G Click System
- Waterproof:** 100%
- Installation Method:** Floating Floor
- Pack Size:** 1.725m<sup>2</sup>
- Weight:** 22kg / per box
- Boards per pack:** 5 Boards
- Slip Resistance:** P4
- Wear Layer:** 0.5mm
- Construction:** PVC Embossed Wear Layer with Limestone & PVC Composite Core
- VOC Rating:** E1
- Warranty:** 20 years Residential + Commercial on request
- Structural Warranty:** Lifetime
- Accessories:** Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



BLONDE ASH



BLACKBUTT



FAWN



URBAN OAK



BRUSHED SPOTTED GUM



GREY IRONBARK



BRUSH GREY



WHITE OAK



STAIN GUARD



EASY TO CLEAN



DURABLE



SCRATCH SAFE



Herringbone SPC Hybrid flooring is a tough and highly durable choice for modern interiors. Due to its unique stone polymer composite (SPC) construction, Easi-Plank is 100% waterproof, providing ultimate peace of mind for everyday residential living.

Interior waterproof, can be installed in wet areas including bathrooms and laundry. SPC flooring provides a hard wearing surface with good dimensional stability. Excellent for renovations over existing ceramic tiles, minimal telegraphing. High impact surface resistance, 0.5mm décor vinyl wear layer. Wide plank formats & click profile for easy install. Attached IXPE 1.5mm acoustic underlay to enhance walking comfort, warmth and minimise sound transmission.

The visual décors feature realistic timber textures and colours in both classic Australian Timber and a contemporary colour palette. The planks also feature an attached acoustic IXPE foam layer that delivers excellent noise reduction capabilities. Easi-Plank is anti-static and will resist common household stains & spillage.

## COLOUR SHADE SELECTION

### SPECIFICATIONS:

**Type:** Hybrid Herringbone Floating Flooring

**Thickness:** 8mm (1mm underlay)

**Width:** 125mm

**Length:** 625mm

**Surface Finish:** Slight embossed texture

**Edging:** Micro Bevelled Edge

**Profile:** Angle Unilin

**Waterproof:** 100%

**Installation Method:** Floating Floor

**Pack Size:** 1.09m<sup>2</sup>

**Weight:** 15.7kg / per box

**Boards per pack:** 14 Boards

**Slip Resistance:** P4

**Wear Layer:** 0.7mm

**Construction:** SPC Limestone

**VOC Rating:** E1

**Warranty:**

- 20 years Residential
- 5 years Commercial on request



WHEAT



PORCELAIN



BARNSIDE



RED STONE



PEWTER



NATURAL BLACKBUTT



OAK NATURAL



GREY STONE




## 6.5mm Hybrid

### SPECIFICATIONS:


- Type:** Hybrid Floating Flooring
- Thickness:** 6.5mm  
*(1.5mm Built in Acoustic 6 star Underlay)*
- Width:** 182mm
- Length:** 1540mm
- Surface Finish:** UV Coating- Matt Embossed Surface
- Edging:** Square Edge
- Profile:** Licenced Click System
- Waterproof:** 100%
- Installation Method:** Floating Floor
- Pack Size:** 2.243m<sup>2</sup>
- Weight:** 23.5kg / per box
- Boards per pack:** 8 Boards
- Slip Resistance:** P3
- Wear Layer:** 0.5mm
- Construction:** Rigid Core; LVT balance layer; Cushion pad
- VOC Rating:** E0
- Warranty:** 20 years Residential + Commercial on request
- Structural Warranty:** Lifetime
- Accessories:** Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



### COLOUR SHADE SELECTION



QLD SPOTTED GUM




PALOMA NATURAL



COTTON WHITE



STONE GREY




PALE TAN



COASTAL BLACKBUTT




BLACKBUTT



SNOWY WHITE



HARBOR GREY



NSW SPOTTED GUM



# 12mm Laminate

## COLOUR SHADE SELECTION

Exclusive collection to Imperial Flooring Australia, commercial wear layer grade with 48hr water resistance protection. The perfect range for heavy traffic commercial & residential projects

**Water Resistant**

48 hours water protection resistant flooring.

**Anti-Scratch Surface**

Excellent resistant to scratches, scrapes and dents.

**Authentic Colours**

The feel and look of real wood flooring colour selections.

**Easy Install & Maintenance**

Easy DIY installation with the 2G Valinge clip system.

**Pet Friendly**

Perfect for pet owners whose pets frequently come back with muddy paws from a morning walk.

**SPECIFICATIONS:**

- Type:** Laminate Flooring
- Dimension(mm):** 1516mm (L) x 238mm (W)
- Thickness(mm):** 12mm
- Wear Rating:** AC4
- Core:** Water Resistant Treated Core
- Gloss Level:** Matte
- Joining System:** Valinge 2G Click System
- Pack Size:** 6 Planks / 2.1648 m<sup>2</sup>
- Installation Methods:** Floating Floor
- Warranty**
- Residential:** 20 Years
- Commercial:** On request
- Accessories:** Pre-Fabrication Matching Stair Nosing's & finishing trims



STRAW OAK



SCENIC OAK




OXFORD OAK



AUBURN BLACKBUTT



SOUTHERN SPOTTED GUM



IRONBARK



HARBOR GREY



AUBER OAK



# 12mm Laminate

## COLOUR SHADE SELECTION


*Timber Feel & Look Laminate Flooring  
Oakleaf HD plus collection*

**SPECIFICATIONS:**


- Type:** Timber Look Laminate Flooring
- Dimension(mm):** L2200mm x W196mm
- Thickness(mm):** 12mm
- Surface Finish:** High Definition Digital Print realistic timber visuals, colours, and textures.
- Gloss Level:** Super Matte
- Edging:** 4 Sided Micro-Bevel
- Joining System:** 5G Valinge Licenced Clip System
- Pack Size:** 4 Planks / 1.725 m<sup>2</sup>
- Patterns:** 30 different pattern designs
- Scratch / Wear Rating:** AC4
- Slip Test Rating:** P3
- Installation Methods:** Floating on Underlay
- Water Resistant:** 48 hours
- VOC:** E1
- Warranty Residential:** 20 Years
- Warranty Structural:** 25 Years
- Accessories:** Pre-Fabricated Stair Nosing's, Colour Matching 12mm C Channels & Finishing Trims



ALPINE MIST



AGED NATURAL




ARCTIC FOX



SIERRA OAK



BLACKBUTT



DELTA SAND



HICKORY




NATURAL



SILK GREY




WOLF GREY



SPOTTED GUM



CLOVE



BEDROCK



## Herringbone

## COLOUR SELECTION

Make a statement with our beautiful & cost effective Laminate Herringbone Flooring. **100% Waterproof Flooring**

The Aquamarine is Imperial Flooring's most innovative flooring design yet. Built with next generation manufacturing technology and sustainable High Density Flooring wood, the Aquamarine is a step above your usual flooring products.

Our Aquamarine flooring features a waterproof interior core, durable and sturdy structure and an aesthetic pleasing visual design. If you're looking for a great looking floor with incredible resilience and lifespan, look no further than the Aquamarine.

What Makes The Aquamarine So Resilient?

Aquamarine's superior durability and sturdiness is thanks to the next generation manufacturing technology used to build it. Not only do we use High Density Flooring wood, we also use a unique glue formulation to bring and hold everything together. Combined with rigorous testing, the Aquamarine is the most stable flooring product on the market, boasting a lifespan of over 25 years.

### **SPECIFICATIONS:**

**Type:** Herringbone Laminate Waterproof Flooring

**Dimension(mm):** 600mm (L) x 126mm (W)

**Thickness(mm):** 10.3mm

**Wear Rating:** AC4

**Core:** Waterproof wood based core

**Gloss Level:** Matte

**Profile:** Micro-Bevel

**Joining System:** 2G Lock System

**Pack Size:** 1.8144 m<sup>2</sup>

**Installation Methods:** Floating Floor

### **Warranty**

- Residential: 25 Years
- Commercial: 5 Years

**Accessories:** Pre-Fabrication Matching Stair Nosing's & Straight Boards to suit



TUSCAN SUN



SHELL COVE



OCEAN ROAD



SEA SALT



SANDCASTLE



SPOTTED GUM



## 10mm Laminate

Waterproof Flooring Laminate is Imperial Flooring's most innovative flooring design yet. Built with next generation manufacturing technology and sustainable High Density Flooring wood, the flooring is a step above your usual flooring products.

Our waterproof flooring features a waterproof interior core, durable and sturdy structure and an aesthetic pleasing visual design. If you're looking for a great looking floor with incredible resilience and lifespan, look no further than the Aquamarine.

### What Makes The Laminate Waterproof Flooring So Resilient?

Superior durability and sturdiness is thanks to the next generation manufacturing technology used to build it. Not only do we use High Density Flooring wood, we also use a unique glue formulation to bring and hold everything together. Combined with rigorous testing, the waterproof flooring is the most stable flooring product on the market, boasting a lifespan of over 25 years.

### 10mm SPECIFICATIONS:

**Type:** Laminate Waterproof Flooring  
**Dimension(mm):** 1515mm (L) x 237mm (W)  
**Thickness(mm):** 10.3mm  
**Wear Rating:** AC4  
**Core:** Waterproof wood based core  
**Gloss Level:** Matte  
**Profile:** Micro-Bevel  
**Joining System:** 2G Lock System  
**Pack Size:** 6 Planks / 2.154 m<sup>2</sup>  
**Installation Methods:** Floating Floor  
**Warranty**

- Residential: 25 Years
- Commercial: 5 Years

**Accessories:** Pre-Fabrication Matching Stair Nosing's

**100% Waterproof  
FLOORING**

## COLOUR SELECTION



SHELL COVE



TUSCAN SUN



SANDCASTLE



SEA SALT



OCEAN ROAD



AU SPOTTED  
GUM



## 12mm Laminate

## 48hr **Water** Resistant FLOORING

### Premium Commercial Grade AC5 Laminate

This is a range of stylish laminate flooring that is to mimic natural looking decors and Australian species designs. Swish Aqua laminate is made with an eye for beauty. It is an aesthetically pleasing flooring that has been made to the highest quality. It is not only warm and aesthetic but also super and tough enough to resist scratches.

### What sets it apart from the rest?

- Swish laminate aqua range is a notch above the rest of laminate flooring competing products. Here are a few reasons why it stands a cut above the rest.
- Aqua core – Swish laminate Aqua features a super low swelling HDF wood core. This makes it possible to lay the boards across room 32 meters without expansion gaps in the middle. This is a huge plus if you are flooring a large space. The floor maintains a more uniform look.
- Easy DIY installation - This flooring feature the world's best click lock systems. This locking technology makes it easier and faster to install the flooring. No glues or nails are required. It is possible to install this flooring without heavy duty tools. Your hand's fingertips are enough for most of the work
- Natural touch surface - Swish laminate aqua range also strongly resembles natural Australian wood species. The patterns are embossed for a registered real wood feel.
- Water resistant - This flooring will withstand normal household spills up to 48 hours.
- Super tough scratch resistance - The surface has an AC5 rating. It also impacts resistant meaning items can be dropped on it without denting or chipping.
- Effortless cleaning - Swish laminate aqua flooring can be cleaned quickly. It is safe to clean with soap and water
- Low maintenance and hard wearing – It does not require sanding or staining like natural wood. The Resistant surface makes this flooring suitable even for high foot traffic areas. The floor is also stain resistant making it maintain its looks even in a household with children and pets.
- Non-fading – This flooring will not require painting or staining as the covering coat does not fade easily.
- Flame resistant – This is safer to build with especially for a residential house

### **SPECIFICATIONS:**

- Type:** Laminate flooring
- Thickness:** 12.3mm
- Width:** 196mm
- Length:** 2200mm
- Edging:** Micro-Bevelled Edge
- Profile:** Valinge 5G lock
- Installation Method:** Floating, glue less on top of underlay
- Pack Size:** 2.16 m2
- Pack weight:** 23 kg
- Boards per pack:** 5
- VOC Rating:** <E1
- Water Resistance:** 48 hour Protection
- Construction:** Aqua core
- Abrasion Resistance:** AC5 Rating
- Applications:** For use in interior areas of private homes and commercial establishments
- Warranty:** 25 years for private use , 7 years commercial use in accordance with the Swish laminate warranty terms



**SWISH AQUA COLOUR SELECTION**

HAWAII OAK



MANHATTEN OAK



MADRID OAK



BLACKBUTT



OAK FREMONT



NSW SPOTTED GUM



QLD SPOTTED GUM



SMOOTH BLACKBUTT



SPOTTED GUM LIGHT



OAK AMELIA



SPOTTED GUM



OAK CHELSEA



OAK COLONIAL



MONTREAL OAK



FENDI OAK





## 3mm Silver (2in1) Foam Underlay

### SPECIFICATIONS:

Type: Standard Silver Foam  
 Moisture Barrier Overlap: Yes  
 Roll Size: 20sqm Roll  
 Thickness: 3mm  
 Width: 1metre  
 Peel & Stick Tape: Yes  
 AAAC Star Rating: 4  
 Suitable Floor Coverings: Laminate, Bamboo & Engineered Flooring  
 Strata Certified: No  
 Installation Method: Floating Floor ONLY  
 Installation of Underlay: Loose lay installation ONLY



## 3mm Acoustic Rubber Matting Underlay

### SPECIFICATIONS:

Product: Floating Floor Underlay or Direct Glue Down  
 Type: Rubber  
 Colour: Multicolour  
 Surface: Granular Texture  
 Grade: Commercial & Residential  
 Density: 850 Kg/m<sup>3</sup>  
 Acoustic Performance: 43dB  
 AAAC Star Rating: 5  
 Roll Size:  
 • 3mm = 10 sqm  
 Width = 1metre  
 Thickness: 3mm  
 Suitable Floor Coverings: Laminate & Engineered Flooring  
 Strata Certified: Yes  
 Acoustic Report: Yes  
 Installation Method: Floating Floor or Direct Dual Bond Stick Down (Glue)  
 Installation of Underlay: Loose lay installation or glue down.  
 Ground Level Concrete: Install Builders Plastic or Moisture Barrier first



## 5mm Acoustic Rubber Underlay 12.5m<sup>2</sup> Regupol 5512 Sonus Core 5

### SPECIFICATIONS:

Product: Floating Floor Underlay or Direct Glue Down  
 Type: Rubber  
 Colour: Multicolour  
 Surface: Granular Texture  
 Roll Size: 12m<sup>2</sup> ( 10lm x 1.25m ) Rolls  
 Thickness: 5mm  
 Weight: 46kg per roll  
 Suitable Floor Coverings: Laminate, Timber, Parquetry & Engineered Timber Flooring  
 Strata Certification: Yes  
 Install Method: Floating Floor & Direct Dual Bond Glue  
 Installation of Underlay: Glue Down Only!



## Bostik Ultraset HP MS Polymer Timber Flooring Adhesive 16kg



Bostik Ultraset HP is a one part solvent and isocyanate free MS polymer based elastomeric adhesive formulated to adhere most types of timber flooring systems.

- Meets requirements for EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- Non-hazardous, solvent and isocyanate free formulation
- Very low VOC
- Non flammable
- No mixing; ready to use
- Easy to spread while maintaining stable peaks
- Will not re-emulsify when in contact with moisture
- Tested to ASTM C794 for peel adhesion to various species of Australian hardwood
- Remains flexible after full cure
- Excellent initial grab and final bond strength
- Excellent acoustic properties
- Suitable over radiant heating
- Australian made

### Recommended Uses

Adhering parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete subfloors.

Adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system.

### Specifications:

**Colour:** Brown

**Viscosity:** Smooth paste; holds peaks

**Composition:** MS Polymer

**Application temperature:** 5 to 30°C

**Pack Sizes:**

- 16kg Pail (10L)
- 600mL Sausage

**Specific Gravity:** 1.6 Approx.

**Cure Rate:** 2.5mm / 24hrs

**Cure System:** Moisture Cure

**Full Cure:** (1mm film) Approx. 18-24hrs Depending on temperature and relative humidity. Curing time extended in low humidity

Elongation: 300%

**Walk on time:** 16hrs - light traffic

**Tack Free time:** Approx. 1.25hrs @ 23°C 50% RH

**Shore A Hardness:** Approx. 50

**Tensile Strength in Shear (2mm) Timber to Timber - BS EN 14293**  
1.3N/mm

**Coverage:** V3 Notch = 1.2-1.4m<sup>2</sup> / per litre V4 Notch = 1-1.2m<sup>2</sup> / per litre

### Suitable For:

- Solid Timber
- Engineered Timber
- Parquetry
- Timber Stair Installs
- Hybrid & Laminate Stair Installs
- Plywood
- Rubber Underlay Matting
- Installing Trims



## Bostik Ultraset 3in1 Acoustic Timber Flooring Adhesive 26kg

Bostik Ultraset 3 in 1 is a high performance flooring adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology is used in this formulation, maintaining the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives.

- 3 in 1 adhesive, moisture control and sound reduction membrane
- Thickness Control™ Spacer Technology maintains thickness between hardwood flooring and substrate
- Extremely low moisture vapour permeability
- Superior sound control typically outperforms 3mm rubber underlay
- 3mm Anti-fracture performance can bridge cracks up to
- Zero VOC (as calculated per SCAQMD Rule 1168)
- No restriction on board width or length
- Blockade® anti-microbial protection

### Recommended Uses:

Suitable substrates include: concrete, terrazzo, ceramic tiles, timber, plywood and cement backer board- Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered flooring and bamboo flooring.

### Coverage:

**V4 Flat Notch (4.8mm) = 20-22m<sup>2</sup> @ 4.8mm Trowel Spread**

**V6 Notch Trowel (6mm) = 12-13m<sup>2</sup> @ 6mm Trowel Spread**



## WAKOL PU280 - Moisture Barrier - 1 Component Ready to use Full Membrane

Wakol PU 280 is a ready-to-use 1-component polyurethane primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for capillary ascending humidity and higher residual humidity up to 6 CM% / 98 corresponding RH % in cement screeds without floor heating, on heated cement screeds up to max. 3 CM% / 85 corresponding RH % as well as on concrete up to max. 7,5% by weight / 98 corresponding RH %; applicable as moisture barrier on unheated cement screeds and concretes without prior moisture measurement.

### Suitable Applications:

#### Porous & NON-Porous Surfaces

- Concrete
- Screed
- Timber
- Plywood
- Tiles
- Most Surfaces

### Coverage:

1 Coat @ 150µm wet film

- 5L Consumption = 45 m<sup>2</sup>
- 11L Consumption = 100-110 m<sup>2</sup>





## DL55 Indoor Floor Self Levelling Compound 20kg

### Description:

DL55 is an advanced cement and polymer based levelling and smoothing compound. DL55 is formulated for experienced commercial contractors to smooth and level large commercial and retail areas. Once dry it is suitable for the application of timber flooring, vinyl, carpet and tile floor finishes. Unlike normal hydration levellers, DL55 will harden and dry at temperatures down to 10°C.

### Composition:

- Super smooth – requires no sanding
- Versatile – apply **1.5mm to 75mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application

### Technical Data:

#### Compression Strength

After 1 Day Approx. 15MPa  
 After 7 Days Approx. 25MPa  
 After 28 Days Approx. 35MPa

#### Tensile Bending Strength

After 1 Day Approx. 5MPa  
 After 7 Days Approx. 7MPa  
 After 28 Days Approx. 10MPa

**Colour:** Grey

**Water / Compound Ratio:** 4.4L / 20kg bag

**Working Time:** 20-30 minutes

**Pack-size:** 20kg/bag

**Coverage:** Covers approx. 5m<sup>2</sup> at 3mm thick



## DP70 Universal Porous & Non Porous Primer 5kg + 20kg Drums

### Description:

Cemimax DP70 is a low emission, multi-purpose dispersion primer for for existing surfaces on **indoor & outdoor** applications. Use on surfaces with well-bonded, waterproof adhesive and smoothing compound residues.

### Technical Data:

**Packaging:** Plastic bucket

**Pack size:**

- 5kg / 4L
- 20kg / 16L

**Shelf-life:** 12 months

**Touch Dry Time:** 15 -20min

**Coverage:** Approx. 12m<sup>2</sup> /1 Litre

**Drying time:** 4-6 hours

**Suitable for CONCRETE, TIMBER, TILES, PLYWOOD, SLATE + more**



## DL59 Indoor + Outdoor Floor Premium Self Levelling & Overlayment Compound 20kg

### Description:

DL59 is a cement based leveling compound with very high compressive strength to C40. DL59 is especially suitable for high traffic and heavy wear locations. DL59 can be also used as overlays for polished concrete. Suitable for all floor coverings

### Composition:

- Super smooth – requires no sanding
- Extremely high strength of compression and bending
- Versatile – apply **1.5mm to 40mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application
- Can be polished
- Can add colours & aggregate to mix

### Technical Data:

#### Compression Strength

After 1 day approx. 15MPa  
 After 7 days approx. 25MPa  
 After 28 days approx. 40MPa

#### Tensile Bending Strength

After 1 day approx. 5MPa  
 After 7 days approx. 7MPa  
 After 28 days approx. 10MPa

**Colour:** Grey

**Water / Compound Ratio:** 4.0L / 20kg Bag

**Working Time:** 20-30 minutes

**Pack-size:** 20kg/bag

**Coverage:** Covers approx. 5m<sup>2</sup> at 3mm thick



**TILES**



**CONCRETE**



**TIMBER**



**OUTDOORS**



**WET AREAS**



## THOR FLOOR PROTECTION MATTING ROLLS

### 40metres x 750mm (30m<sup>2</sup> Rolls)



form-A-guard is a triple layered, foam backed, nonabrasive surface protection product, which is suitable for protecting solid floors including polished timber, parquet, vinyl, tiles, slate, marble and polished concrete (sealed only). The form-A-guard is also suitable for the protection of kitchen and bathroom sinks, bench tops, vanity basins, bath tubs and shower bases.

Also recommended for use with the form-A-guard, is the THOR Membrane Tape and Joining Tape. The THOR Membrane Tape is a low tack, clean release tape that can be applied directly to the perimeter of a cleaned surface area. It is advised that periodic checks should be conducted on the THOR Membrane Tape after 1 month of application to ensure clean removal.

#### DIMENSIONS:

Size: 750mm wide x 40m long , covers 30sqm



## THOR JOINING TAPE

THOR printed Joining Tape has been specifically designed to safely join form-A-guard to secure and prevent movement whilst protecting your valuable surfaces. THOR Joining Tape offers a strong bond and as such should not be applied directly to any finished or polished surface.

**\*\* THOR Joining Tape is not to be applied directly to any finished surface \*\***

#### DIMENSIONS:

Size: 48mm wide x 100metre long tape roll



## THOR EDGE TAPE PRE-APPLICATION

THOR Pre-App PVC tape has been specifically designed for cured, sealed and finished solid surfaces such as walls, tiles, bench tops, engineered timber flooring etc. The Pre-App tape can also be used as a perimeter or a membrane tape.

#### FEATURES:

- Easy release
- Clean removal
- UV stabilised

#### DIMENSIONS:

Size: 48mm wide x 66metre long tape roll



## ONE STOP SHOP FLOORING STORE



WHITE NON - MARKING  
MALLETS



TROWELS V3 + V4 + V6  
TIMBER FLOORING



SAUSAGE GUNS 600ML



CLEANING WIPES  
NON-SCRATCH



PRO CUTTING  
TOOLS



BOSTIK ADHESIVES  
& ACCESSORIES



FLOOR LEVELING  
COMPOUNDS & PRIMERS



UNDERLAY



GAUGE RAKE FLOOR  
LEVELLING



STAND UP FLOOR  
LEVELING TROWELS



SPIKE ROLLER  
FLOOR LEVELLING



DIY FLOOR  
LAYING KIT



PULLING IRON



WAKOL MS335 REPAIR  
HOLLOW SPOTS



SCRATCH REPAIR



PVA 500ML T+G  
FLOATING FLOOR GLUE

SHOP ONLINE: [www.imperialflooringaustralia.com.au/shop](http://www.imperialflooringaustralia.com.au/shop)



PRE-FABRICATED STAIR NOSINGS **SQUARE EDGE WITH OVERHANG** ENGINEERED TIMBER FLOORING



PRE-FABRICATED STAIR NOSINGS **FLUSH BOX** ENGINEERED TIMBER FLOORING



PRE-FABRICATED STAIR NOSINGS MATCHING COLOUR TO **HYBRID** FLOORING OPTIONS



PRE-FABRICATED STAIR NOSINGS MATCHING COLOUR TO **LAMINATE** FLOORING OPTIONS



CHAMPAGNE - C CHANNEL END TRIM - ALL SIZES



SILVER - C CHANNEL END TRIM - ALL SIZES



BLACK - C CHANNEL END TRIM - ALL SIZES



COLOUR MATCHING - C CHANNEL END TRIM ENGINEERED TIMBER



COLOUR MATCHING L ANGLES - LAMINATE & ENGINEERED



COLOUR MATCHING L ANGLES - HYBRID



COLOUR MATCHING C CHANNELS - HYBRID




COLOUR MATCHING C CHANNELS - LAMINATE

## PERIMETER EXPANSION GAP SCOTIA BEADINGS FIXED TO EXISTING OR NEW SKIRTING BOARDS



**WHITE**  
SCOTIA

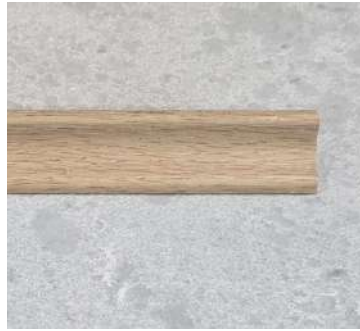

**NATURAL OAK**  
SCOTIA



**LIGHT OAK**  
SCOTIA



**BROWN**  
SCOTIA



**GREY**  
SCOTIA



**NEW ENGLAND BLACKBUTT**  
SCOTIA



**SANDSTONE**  
SCOTIA



**SPOTTED GUM**  
SCOTIA



**BLACK**  
SCOTIA











## Sales Inquiries

Contact: 1300 676 176

Email: [info@imperialflooringaustralia.com.au](mailto:info@imperialflooringaustralia.com.au)

## HEAD OFFICE + SHOWROOM

2/25 Investigator Drive  
Unanderra NSW 2526

## Wollongong | Sydney | Melbourne

DISTRIBUTION CENTRES

**atfa** | Australasian  
Timber Flooring  
Association

# IMPERIAL

## FLOORING AUSTRALIA

WHOLESALE - COMMERCIAL - TRADE - RETAIL - DIY

### FLOORING PACKAGES

[www.imperialflooringaustralia.com.au](http://www.imperialflooringaustralia.com.au)