

PRODUCT BROCHURE

IMPERIAL
FLOORING AUSTRALIA
DESIGN - SELECT - CREATE



WHOLESALE - COMMERCIAL - TRADE - RETAIL - DIY
IN-STORE & ONLINE FLOORING PACKAGES

1300 676 176

info@imperialflooringaustralia.com.au

www.imperialflooringaustralia.com.au



SHIPPING AUSTRALIA WIDE

Shop now. Pay later.
Always interest-free.



FOLLOW US..



Australasian
Timber Flooring
Association



SHOP ONLINE | IN-STORE

Imperial Flooring Australia 100% Australian Owned and Family Operated Online + Instore Flooring Store, specialising in Wholesale, Commercial, Trade, Retail & DIY Flooring Distribution & Flooring Installation Package Solutions. With our Head Office & Designer Flooring Showroom based in Unanderra (Wollongong) and our Distribution Centres distributing flooring packages from Wollongong & Sydney; our range of flooring products provide you with a complete flooring installation solution for industrial, health, education, commercial, residential, etc.

Imperial Flooring Australia continue to set benchmarks for its clients providing products and services to Australia's leading construction companies through certified installers for **Supply + Install** Packages & **Supply Only** Flooring options.

Our teams provide you the full solution with our inhouse certified floor laying teams; to get your project complete on time and within your budget.

Our Product Range:

- Engineered Oak Timber Flooring
- Hybrid Waterproof Flooring
- Laminate Flooring
- Herringbone Oak
- Chevron Oak
- Australian Engineered Timber Flooring
- Cemimax Floor Self Levelling Compounds
- Bostik Flooring Adhesives & Accessories
- Moisture Barriers
- Flooring Accessories & Trims
- Foam Underlays & Acoustic Underlays
- Bona Floor Care Products
- Floor Protection
- Pre-Fabricated Stair Nosing for All Flooring Ranges
- Floor Installation Tools
- Free Sample Program



We Ship Australia Wide!

atfa

Australasian
Timber Flooring
Association

OUR RANGE

Offering our clients a complete flooring package solution ✓



Engineered Timber Flooring
Pages 4 - 9 + 14



Herringbone
Pages 5 + 10 - 11



Chevron
Pages 12 - 13



Hybrid Waterproof Flooring
Pages 15 - 17



Laminate Flooring
Pages 18 - 24



Foam & Acoustic Underlay
Pages 25



Flooring Adhesives
Pages 26




Floor Levelling Compounds
Page 27



Flooring Accessories & Tools
Pages 28 - 32

+ MUCH MORE

Chat to our team for your next flooring project solutions!

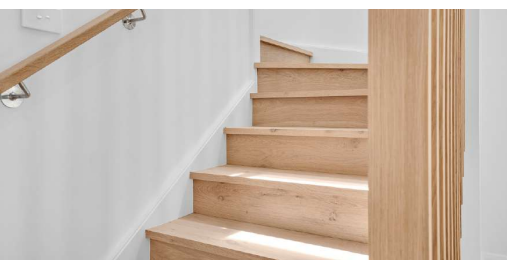

14mm/2 Oak

14mm Engineered Oak Timber Flooring exclusive to Imperial Flooring Australia. Our Engineered Oak is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.


SPECIFICATIONS:

Timber Grade: Natural - ABCD
Dimension(mm): L1900 x W190
Thickness(mm): 14
Top Layer(mm): 2
Surface Finish: Brushed UV Lacquer
Gloss Level: 5-8% Super Matt
Nesting: Less than 25% random short boards
Edging: 4 Sided Micro-Bevel
Joining System: Tongue and Groove
Pack Size: 8 Planks / 2.888 m²
Weight: 26kg / per box
Slip Resistance: P3
Installation Methods: Floating on Underlay or Direct Glue Down
Warranty:


- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime


COLOUR SPECIES SELECTION



NATURAL OAK




TUSCAN OAK




WHITE HAVEN



CREAM WHITE




COUNTRY OAK




LIGHT BROWN



PALE OAK



CEDAR BROWN



BLACK OPAL



SQUARE OVERHANG



FLUSH 90 DEGREE

STAIR NOSING PROFILES



15mm/3 Oak

15mm Engineered Oak Timber Flooring exclusive to Imperial Flooring Australia. Our Engineered Oak is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

SPECIFICATIONS:

Timber Grade: Natural - ABCD

Dimension(mm): L1900 x W190

Thickness(mm): 15

Top Layer(mm): 3

Surface Finish: Light Brushed Lacquer

Gloss Level: 5-8% Super Matt

Nesting: Less than 15% random short boards

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size: 8 Planks / 2.888 m²

Weight: 26kg / per box

Slip Resistance: P3

Installation Methods: Floating on Underlay or Direct Glue Down

Warranty:

- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime

COLOUR SPECIES SELECTION




LIGHT NATURAL




WHITE WASH



NEUTRAL OAK



RAW OAK



TINGE OAK



GOLDEN OAK



SANDY BAY



HICKORY BROWN



CHARCOAL



14mm/3 Oak

ABC = Less knots, cleaner look

Premium Pronto ABC Grade 14mm Engineered Oak Timber Flooring. Our Engineered Oak is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed and can be re-finished in its lifetime.

SPECIFICATIONS:

Timber Grade: ABC

Dimension(mm):

- Plank = L1900 x W190
- Herringbone = L600 x W120

Thickness(mm): 14

Top Layer(mm): 3

Surface Finish: Light Wire Brush

Gloss Level: Matt Finish

Nesting: Less than 25% random short boards

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size:

- Plank = 6 Planks / 2.166 m²
- Herringbone = 10 Panels / 0.864 m²


Slip Resistance: P3

Installation Methods: Floating on Underlay (Plank Only) or Direct Glue Down


Warranty:

- Residential: 20 Years
- Commercial: By Request

PLANK COLOURS




WASHED PEBBLE




PARCHMENT



MISTY COVE




CHESTERFIELD



SEAFOAM

HERRINGBONE COLOURS




WASHED PEBBLE




PARCHMENT



MISTY COVE



CHESTER FIELD



SEAFOAM



15mm/4 Oak

If you love the look of fine oak flooring then Prestige Oak is the natural choice. Sharing the unrivalled beauty and character of traditional European Oak, Prestige Oak Flooring is a popular choice amongst leading Australian architects and designers. Design flexibility is assured with stunning extra wide planks and an extensive palette of pre-finished natural, and stained décors.

Our versatile Prestige Oak range includes a selection of widths and thicknesses for a variety of applications. Available in both traditional Tongue & Groove and the ever popular Unilin click system for fast and convenient installation. On-trend colours, scratch resistant coatings, Prestige Oak flooring ensures lifetime enjoyment.

SPECIFICATIONS:

Timber Grade: ABCD & AB Grade

Species: European Oaks

Dimension(mm): L1900mm x W190mm

Thickness(mm): 15mm

Top Layer(mm): 4mm

Surface Finish: Wire Brush

Gloss Level: Matte

Nesting: 25% random short boards

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove & Click System

Pack Size: 6 Planks / 1.805 m²

Slip Resistance: P3

Installation Methods: Floating on Underlay or Direct Glue Down

VOC: Toxic Free Water Based Matte Coating E1

Warranty:

- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime

Accessories: Pre-Fabricated Stair Nosing's, Colour Matching 15mm C Channels


COLOUR SPECIES SELECTION



PURE NATURAL



PARANA



WHITE SANDS




VANILLA



STRAW




TAN



STORM



SAUVIGNON



RIESLING



MARBLE



LATTE



LIME WASH



IRON GREY



HERITAGE GREY



GREY WASH



HB DARK BROWN



COLONIAL GREY



CHESTNUT



AVOLA NATURAL



CHATEAU GREY



20mm/6 Oak

Engineered Oak Timber Flooring is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core. Each timber panel provides unique features giving a touch of luxury to any new or existing property. Our 20mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

SPECIFICATIONS:

Timber Grade: Natural - ABCD

Dimension(mm): L2200 x W220

Thickness(mm): 20

Top Layer(mm): 6

Surface Finish: Light Brushed UV Lacquer

Nesting: Less than 25% Random Short Boards

Gloss Level: 5-8% Super Matt

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size: 4 x Planks / 1.936m²

Weight: 27kg / per box

Slip Resistance: P3

Installation Methods: Direct Glue Down / Floating Floor

Warranty:


- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime

COLOUR SPECIES SELECTION



HICKORY BROWN



RAW OAK



WHITE WASH



MINK GREY



LIGHT NATURAL



GOLDEN OAK



SANDY BAY



21mm/6 Oak

If you love the look of fine oak flooring then Prestige Oak is the natural choice. Sharing the unrivalled beauty and character of traditional European Oak, Prestige Oak Flooring is a popular choice amongst leading Australian architects and designers. Design flexibility is assured with stunning extra wide planks and an extensive palette of pre-finished natural, and stained décors.

Our versatile Prestige Oak range includes a selection of widths and thicknesses for a variety of applications. Available in both traditional Tongue & Groove and the ever popular Unilin click system for fast and convenient installation. On-trend colours, scratch resistant coatings, Prestige Oak flooring ensures lifetime enjoyment.

SPECIFICATIONS:

Timber Grade: ABCD & AB Grade

Species: European Oak

Dimension(mm): L2200mm x W220mm

Thickness(mm): 21mm

Top Layer(mm): 6mm

Surface Finish: Wire Brush

Gloss Level: Matte

Nesting: 25% random short boards

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove & Click System

Pack Size: 6 Planks / 1.936 m²

Slip Resistance: P3

Installation Methods: Floating on Underlay or Direct Glue Down

VOC: Toxic Free Water Based Matte Coating E1

Warranty:

- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime

Accessories: Pre-Fabricated Stair Nosing's, Colour Matching 15mm C Channels

COLOUR SPECIES SELECTION



GRIGIO



PARANA



GLACIER




MARBLE



RAW



CREMA



CANNES




CHAMPAGNE



CHARDONNAY



SEMILLION



STRAW



TOKAY



GREY MIST




DOVER GREY



BEACH DRIFTWOOD



AGED OAK



LATTE



SLATE



MERLOT



BLACK FOX



15mm/3 Herringbone

15mm Herringbone Parquet Engineered Oak Timber Flooring exclusive to Imperial Flooring Australia. Our Engineered Oak is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

SPECIFICATIONS:

Timber Grade: Prime - ABC

Dimension(mm): L600 x W120

Thickness(mm): 15

Top Layer(mm): 3

Surface Finish: Light Brushed UV Lacquer

Gloss Level: 5-8% Super Matt

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size: 16 Planks / 1.152 m²

Weight: 11kg / per box

Slip Resistance: P3

Installation Methods: Direct Glue Down Only

Warranty:

- Residential: 20 Years
- Commercial: By Request

Warranty Structural: Lifetime

COLOUR SPECIES SELECTION



RAW OAK



LIGHT NATURAL



MINK GREY



SANDY BAY



GOLDEN OAK



WHITE WASH




NEUTRAL OAK



HICKORY BROWN



TINGE OAK



CHARCOAL



15mm/3 & 21mm/6

Herringbone

For centuries, classic residencies and spectacular chateaus have all featured the unique beauty of Oak parquetry. Parquetry formations provide these structures unique character and appeal that has truly stood the test of time. Our De Marqué Parquetry Collection draws on this design cue, featuring Herringbone and Chevron patterns for everyday living. A classic and contemporary palette of pre-finished colours provides wonderful warmth and charm to almost any interior

SPECIFICATIONS:

Timber Grade: ABCD

Dimension(mm): 600mm x 120mm

Thickness(mm): 15mm & 21mm

Top layer(mm):

- 15mm = 4mm Veneer
- 21mm = 6mm Veneer

Surface Finish: Light Brushed Surface

Gloss Level: Matte Finish

Edging: Micro-Bevel

Joining System: Tongue and Groove

Pack Size:

- 15mm = 0.720m² / Ctn, 8kgs
- 21mm = 0.576m² / Ctn, 8kgs


Slip Resistance: P3

Installation Methods: Direct Glue Down Only


Warranty:

- Residential = 20 years
- Commercial = 5 years


COLOUR SPECIES SELECTION




PURE NATURAL




PARANA




VINTAGE




STORM




SAUVIGNON




RIESLING




RAW




LATTE




COLONIAL GREY




DARK BROWN



CHATEAU GREY



COGNAC



ASH GREY



CABERNET



15mm/3 & 21mm/6

Chevron

For centuries, classic residencies and spectacular chateaus have all featured the unique beauty of Oak parquetry. Parquetry formations provide these structures unique character and appeal that has truly stood the test of time. Our De Marqué Parquetry Collection draws on this design cue, featuring Herringbone and Chevron patterns for everyday living. A classic and contemporary palette of pre-finished colours provides wonderful warmth and charm to almost any interior

SPECIFICATIONS:

Timber Grade: ABCD

Dimension(mm):

- 15mm = 600mm x 120mm
- 21mm = 600mm x 90mm

Thickness(mm): 15mm & 21mm

Top layer(mm):

- 15mm = 4mm Veneer
- 21mm = 6mm Veneer

Surface Finish: Light Brushed Surface

Gloss Level: Matte Finish

Edging: Square Edge

Joining System: Tongue and Groove

Pack Size:

- 15mm = 0.720m² / Ctn, 8kgs
- 21mm = 0.432m² / Ctn, 6Kgs

Slip Resistance: P3

Installation Methods: Direct Glue Down Only

Warranty:

- Residential = 20 years
- Commercial = 5 years

COLOUR SPECIES SELECTION



PURE NATURAL



PARANA



VINTAGE



STORM



SAUVIGNON



RIESLING




RAW



LATTE



COLONIAL GREY



DARK BROWN



CHATEAU GREY



COGNAC



15mm/3 Chevron

COLOUR SPECIES SELECTION

15mm Chevron Parquetry Engineered Oak Timber Flooring exclusive to Imperial Flooring Australia. Our Engineered Oak is produced with the finest oak resources. Manufactured with a real timber top layer (veneer) with a multi layer plywood inner structure core providing a touch of luxury to all residential & commercial interior spaces. Each timber panel provides unique features with no repetitive pattern to feature throughout the floor space. Our 15mm Engineered Oak can be resurfaced in its lifespan. All our Engineered Oak Timber Flooring collections are manufactured pre-finished (coated) ready to be installed, with a wide range of colours available, from light modern oak to darker oak tones.

SPECIFICATIONS:

Timber Grade: Prime - ABC

Dimension(mm): L770 x W125

Thickness(mm): 15

Top Layer(mm): 3

Surface Finish: Light Brushed UV Lacquer

Gloss Level: 5-8% Super Matt

Edging: 4 Sided Micro-Bevel

Joining System: Tongue and Groove

Pack Size: 16 Planks / 1.54m²

Weight: 14.5kg / per box

Slip Resistance: P2

Installation Methods: Direct Glue Down Only

Warranty:

- Residential: 20 Years
- Commercial: By Request


Warranty Structural: Lifetime



HICKORY BROWN




RAW OAK



MINK GREY



LIGHT NATURAL



SANDY BAY



GOLDEN OAK



AUSTRALIAN HARDWOOD

AUSTRALIAN PREMIUM NATIVE COLLECTION

FIDDLEBACK AUSTRALIAN ENGINEERED TIMBER FLOORING

Introducing our unique Fiddleback Engineered Australian Hardwood collection. It's available in the ever popular Spotted Gum and Blackbutt. Fiddleback wear layers combine the classic features of our Australian Eucalyptus bonded onto an ever reliable Plywood core. This creates an authentic Australian timber visual with the associated stability and durability of an engineered timber construction

Variety Of Sizes


Surface finishes include smooth or brushed textures. Pre-finished matte, water based multi-coat PU lacquer. All sizes display Micro-bevel 4 sides to enhance the plank visual. The Fiddleback plank sizes are recommended as a floating installation and Direct Fix only for parquetry.

Key Features

- Extremely stable with excellent wear resistance
 - Spotted Gum Janka 11kN
 - Impact resistant, durable and stable
 - Blackbutt Janka 9.1 kN
- Profile
- Patented Click format for floating installation & direct stick.
 - T&G for Herringbone & Rustic. Micro Bevelled edges, 4 sides.
- Coating & Surface - Direct Stick Installations
- Smooth & light wire brushed, PU lacquer matte, approx. 10-15% gloss level in both brushed and smooth surface.




COLOUR SPECIES SELECTION



Herringbone
SPOTTED GUM




Herringbone
BLACKBUTT




Available in
Rustic Grade

125mm
SPOTTED GUM




Available in
Rustic Grade

125mm
BLACKBUTT



Available in
Rustic Grade

180mm / 189mm
SPOTTED GUM



Available in
Rustic Grade

180mm / 189mm
BLACKBUTT



9mm Hybrid

COLOUR SHADE SELECTION

SPECIFICATIONS:

Type: Hybrid Floating Flooring

Thickness: 9mm

(2mm Built in Acoustic 6 star Underlay)

Width: 228mm

Length: 1800mm

Surface Finish: UV Coating- Anti bacterial - Scratch Armor

Edging: Square Edge

Profile: Patented 5G Click System

Waterproof: 100%

Installation Method: Floating Floor

Pack Size: 1.6416m²

Weight: 24kg / per box

Boards per pack: 4 Boards

Slip Resistance: P4

Wear Layer: 0.5mm

Construction: PVC Embossed Wear Layer with Limestone & PVC Composite Core

VOC Rating: E1

Warranty: 20 years Residential + Commercial on request

Structural Warranty: Lifetime

Accessories: Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



LIGHT OAK




BONDI SANDS



NEW ENGLAND
BLACKBUTT



SPOTTED GUM




BEACH OAK



LIGHT BEIGE



WHITE BAY



WARM BROWN



ASH GREY



SHADOW GREY





8mm Hybrid

SPECIFICATIONS:

Type: Hybrid Floating Flooring

Thickness: 8mm

(2mm Built in Acoustic 6 star Underlay)

Width: 230mm

Length: 1500mm

Surface Finish: UV Coating- Anti bacterial - Scratch Armor

Edging: Square Edge

Profile: 2G Click System

Waterproof: 100%

Installation Method: Floating Floor

Pack Size: 1.725m²

Weight: 22kg / per box

Boards per pack: 5 Boards

Slip Resistance: P4

Wear Layer: 0.5mm

Construction: PVC Embossed Wear Layer with Limestone & PVC Composite Core

VOC Rating: E1

Warranty: 20 years Residential + Commercial on request

Structural Warranty: Lifetime

Accessories: Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings


COLOUR SHADE SELECTION



BLONDE ASH



BLACKBUTT



FAWN



URBAN OAK



BRUSHED SPOTTED GUM



GREY IRONBARK



BRUSH GREY



WHITE OAK



STAIN
GUARD



EASY TO
CLEAN



DURABLE



SCRATCH
SAFE



6.5mm Hybrid

SPECIFICATIONS:

Type: Hybrid Floating Flooring

Thickness: 6.5mm

(1.5mm Built in Acoustic 6 star Underlay)

Width: 182mm

Length: 1540mm

Surface Finish: UV Coating- Matt Embossed Surface

Edging: Square Edge

Profile: Licenced Click System

Waterproof: 100%

Installation Method: Floating Floor

Pack Size: 2.243m²

Weight: 23.5kg / per box

Boards per pack: 8 Boards

Slip Resistance: P3

Wear Layer: 0.5mm

Construction: Rigid Core; LVT balance layer; Cushion pad

VOC Rating: E0

Warranty: 20 years Residential + Commercial on request

Structural Warranty: Lifetime

Accessories: Matching Stair Nosing + Matching Scotia + L Angles + Reducers + T-Mouldings



STAIN
GUARD



EASY TO
CLEAN



DURABLE




SCRATCH
SAFE

COLOUR SHADE SELECTION



QLD SPOTTED GUM




PALOMA NATURAL



COTTON WHITE



STONE GREY




PALE TAN




COASTAL BLACKBUTT




BLACKBUTT



SNOWY WHITE



HARBOR GREY



NSW SPOTTED GUM



12mm Laminate

COLOUR SHADE SELECTION

Exclusive collection to Imperial Flooring Australia, commercial wear layer grade with 48hr water resistance protection. The perfect range for heavy traffic commercial & residential projects

Water Resistant

48 hours water protection resistant flooring.

Anti-Scratch Surface

Excellent resistant to scratches, scrapes and dents.

Authentic Colours

The feel and look of real wood flooring colour selections.

Easy Install & Maintenance

Easy DIY installation with the 2G Valinge clip system.

Pet Friendly

Perfect for pet owners whose pets frequently come back with muddy paws from a morning walk.

SPECIFICATIONS:

Type: Laminate Flooring

Dimension(mm): 1516mm (L) x 238mm (W)

Thickness(mm): 12mm

Wear Rating: AC4

Core: Water Resistant Treated Core

Gloss Level: Matte

Joining System: Valinge 2G Click System

Pack Size: 6 Planks / 2.1648 m²

Installation Methods: Floating Floor

Warranty

Residential: 20 Years

Commercial: On request

Accessories: Pre-Fabrication Matching Stair Nosing's & finishing trims



STRAW OAK




SCENIC OAK



OXFORD OAK



AUBURN BLACKBUTT



SOUTHERN SPOTTED GUM



IRONBARK



HARBOR GREY



AUBER OAK



12mm Laminate

COLOUR SHADE SELECTION

Timber Feel & Look Laminate Flooring
Oakleaf HD plus collection

SPECIFICATIONS:

Type: Timber Look Laminate Flooring

Dimension(mm): L2200mm x W196mm

Thickness(mm): 12mm

Surface Finish: High Definition Digital Print realistic timber visuals, colours, and textures.

Gloss Level: Super Matte

Edging: 4 Sided Micro-Bevel

Joining System: 5G Valinge Licenced Clip System

Pack Size: 4 Planks / 1.725 m²

Patterns: 30 different pattern designs

Scratch / Wear Rating: AC4

Slip Test Rating: P3

Installation Methods: Floating on Underlay

Water Resistant: 48 hours

VOC: E1


Warranty Residential: 20 Years

Warranty Structural: 25 Years

Accessories: Pre-Fabricated Stair Nosing's,
Colour Matching 12mm C Channels &
Finishing Trims



ALPINE MIST



AGED NATURAL



ARCTIC FOX



SIERRA OAK



BLACKBUTT



DELTA SAND



HICKORY



NATURAL



SILK GREY



WOLF GREY



SPOTTED GUM



CLOVE



BEDROCK



Herringbone

COLOUR SELECTION

Make a statement with our beautiful & cost effective Laminate Herringbone Flooring. **100% Waterproof Flooring**

The Aquamarine is Imperial Flooring's most innovative flooring design yet. Built with next generation manufacturing technology and sustainable High Density Flooring wood, the Aquamarine is a step above your usual flooring products.

Our Aquamarine flooring features a waterproof interior core, durable and sturdy structure and an aesthetic pleasing visual design. If you're looking for a great looking floor with incredible resilience and lifespan, look no further than the Aquamarine.

What Makes The Aquamarine So Resilient?

Aquamarine's superior durability and sturdiness is thanks to the next generation manufacturing technology used to build it. Not only do we use High Density Flooring wood, we also use a unique glue formulation to bring and hold everything together. Combined with rigorous testing, the Aquamarine is the most stable flooring product on the market, boasting a lifespan of over 25 years.

SPECIFICATIONS:

Type: Herringbone Laminate Waterproof Flooring

Dimension(mm): 600mm (L) x 126mm (W)

Thickness(mm): 10.3mm

Wear Rating: AC4

Core: Waterproof wood based core

Gloss Level: Matte

Profile: Micro-Bevel

Joining System: 2G Lock System

Pack Size: 1.8144 m²

Installation Methods: Floating Floor

Warranty

- Residential: 25 Years
- Commercial: 5 Years

Accessories: Pre-Fabrication Matching Stair Nosing's & Straight Boards to suit



TUSCAN SUN



SHELL COVE



OCEAN ROAD



SEA SALT



SANDCASTLE



SPOTTED GUM



10mm + 12mm Laminate

100% Waterproof FLOORING

The Aquamarine is Imperial Flooring Australia's most innovative flooring design yet. Built with next generation manufacturing technology and sustainable High Density Flooring wood, the Aquamarine is a step above your usual flooring products.

Our Aquamarine flooring features a waterproof interior core, durable and sturdy structure and an aesthetic pleasing visual design. If you're looking for a great looking floor with incredible resilience and lifespan, look no further than the Aquamarine.

What Makes The Aquamarine So Resilient?

Aquamarine's superior durability and sturdiness is thanks to the next generation manufacturing technology used to build it. Not only do we use High Density Flooring wood, we also use a unique glue formulation to bring and hold everything together. Combined with rigorous testing, the Aquamarine is the most stable flooring product on the market, boasting a lifespan of over 25 years.

12mm SPECIFICATIONS:

Type: Laminate Waterproof Flooring

Dimension(mm): 2250mm (L) x 235mm (W)

Thickness(mm): 12.3mm

Wear Rating: AC4

Core: Waterproof wood based core

Gloss Level: Matte

Profile: Micro-Bevel

Joining System: Waxed drop lock

Pack Size: 4 Planks / 2.115 m²

Installation Methods: Floating Floor

Warranty

- Residential: 25 Years
- Commercial: 5 Years

Accessories: Pre-Fabrication Matching Stair Nosing's

10mm SPECIFICATIONS:

Type: Laminate Waterproof Flooring

Dimension(mm): 1515mm (L) x 237mm (W)

Thickness(mm): 10.3mm

Wear Rating: AC4

Core: Waterproof wood based core

Gloss Level: Matte

Profile: Micro-Bevel

Joining System: 2G Lock System

Pack Size: 6 Planks / 2.154 m²

Installation Methods: Floating Floor

Warranty

- Residential: 25 Years
- Commercial: 5 Years

Accessories: Pre-Fabrication Matching Stair Nosing's

12mm COLOUR SHADE SELECTION



AYER ROCK



YARRA BAY



SPOTTED GUM



PEBBLE BAY



LAKE HILLIER



HYAMS BEACH



BLACKBUTT

10mm COLOUR SHADE SELECTION



SHELL COVE



TUSCAN SUN



SANDCASTLE



SEA SALT



BLACKBUTT



OCEAN ROAD



SPOTTED GUM

BROWN
MOUNTAIN



12mm Laminate

48hr **Water** Resistant FLOORING

Premium Commercial Grade AC5 Laminate

This is a range of stylish laminate flooring that is to mimic natural looking decors and Australian species designs. Swish Aqua laminate is made with an eye for beauty. It is an aesthetically pleasing flooring that has been made to the highest quality. It is not only warm and aesthetic but also super and tough enough to resist scratches.

What sets it apart from the rest?

- Swish laminate aqua range is a notch above the rest of laminate flooring competing products. Here are a few reasons why it stands a cut above the rest.
- Aqua core – Swish laminate Aqua features a super low swelling HDF wood core. This makes it possible to lay the boards across room 32 meters without expansion gaps in the middle. This is a huge plus if you are flooring a large space. The floor maintains a more uniform look.
- Easy DIY installation - This flooring feature the world's best click lock systems. This locking technology makes it easier and faster to install the flooring. No glues or nails are required. It is possible to install this flooring without heavy duty tools. Your hand's fingertips are enough for most of the work
- Natural touch surface - Swish laminate aqua range also strongly resembles natural Australian wood species. The patterns are embossed for a registered real wood feel.
- Water resistant - This flooring will withstand normal household spills up to 48 hours.
- Super tough scratch resistance - The surface has an AC5 rating. It also impacts resistant meaning items can be dropped on it without denting or chipping.
- Effortless cleaning - Swish laminate aqua flooring can be cleaned quickly. It is safe to clean with soap and water
- Low maintenance and hard wearing – It does not require sanding or staining like natural wood. The Resistant surface makes this flooring suitable even for high foot traffic areas. The floor is also stain resistant making it maintain its looks even in a household with children and pets.
- Non-fading – This flooring will not require painting or staining as the covering coat does not fade easily.
- Flame resistant – This is safer to build with especially for a residential house

SPECIFICATIONS:

Type: Laminate flooring

Thickness: 12.3mm

Width: 196mm

Length: 2200mm

Edging: Micro-Bevelled Edge

Profile: Valinge 5G lock

Installation Method: Floating, glue less on top of underlay

Pack Size: 2.16 m2

Pack weight: 23 kg

Boards per pack: 5

VOC Rating: <E1

Water Resistance: 48 hour Protection

Construction: Aqua core

Abrasion Resistance: AC5 Rating

Applications: For use in interior areas of private homes and commercial establishments

Warranty: 25 years for private use , 7 years commercial use in accordance with the Swish laminate warranty terms



SWISH AQUA COLOUR SELECTION

HAWAII OAK



MANHATTEN OAK



MADRID OAK



BLACKBUTT



OAK FREMONT



NSW SPOTTED GUM



QLD SPOTTED GUM



SMOOTH BLACKBUTT



SPOTTED GUM LIGHT



OAK AMELIA



SPOTTED GUM



OAK CHELSEA



OAK COLONIAL



MONTREAL OAK



FENDI OAK



3mm Silver (2in1) Foam Underlay

SPECIFICATIONS:

Type: Standard Silver Foam
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm Roll
 Thickness: 3mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 4
 Suitable Floor Coverings: Laminate, Bamboo & Engineered Flooring
 Strata Certified: No
 Installation Method: Floating Floor ONLY



2mm Black Acoustic Certified (2in1) Foam Underlay

SPECIFICATIONS:

Type: Foam
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm
 Thickness: 2mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 6
 Suitable Floor Coverings: Laminate & Engineered Flooring
 Strata Certified: Yes
 Acoustic Report: Yes
 Installation Method: Floating Floor ONLY



2mm Green Acoustic (2in1) Foam Underlay

SPECIFICATIONS:

Type: Acoustic Green Underlay
 Moisture Barrier Overlap: Yes
 Roll Size: 20sqm Roll
 Thickness: 2mm
 Width: 1metre
 Peel & Stick Tape: Yes
 AAAC Star Rating: 4
 Suitable Floor Coverings: Laminate, Bamboo & Engineered Flooring
 Strata Certified: No
 Installation Method: Floating Floor ONLY



3mm & 5mm Acoustic Rubber Matting Underlay

SPECIFICATIONS:

Type: Rubber
 Colour: Multicolour
 Surface: Granular Texture
 Grade: Commercial & Residential
 Density: 850 Kg/m3
 Acoustic Performance: 43dB
 AAAC Star Rating: 5
 Roll Size:
 • 3mm = 10 sqm
 • 5mm = 5 sqm
 Width = 1metre
 Thickness: 3mm + 5mm
 Suitable Floor Coverings: Timber, Parquetry, T+G, Laminate & Engineered Flooring
 Strata Certified: Yes
 Acoustic Report: Yes
 Installation Method: Floating Floor or Direct Dual Bond Stick Down (Glue)
 Ground Level Concrete: Install Builders Plastic or Moisture Barrier first



Bostik Ultraset HP MS Polymer Timber Flooring Adhesive 16kg



Bostik Ultraset HP is a one part solvent and isocyanate free MS polymer based elastomeric adhesive formulated to adhere most types of timber flooring systems.

- Meets requirements for EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- Non-hazardous, solvent and isocyanate free formulation
- Very low VOC
- Non flammable
- No mixing; ready to use
- Easy to spread while maintaining stable peaks
- Will not re-emulsify when in contact with moisture
- Tested to ASTM C794 for peel adhesion to various species of Australian hardwood
- Remains flexible after full cure
- Excellent initial grab and final bond strength
- Excellent acoustic properties
- Suitable over radiant heating
- Australian made

Recommended Uses

Adhering parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete subfloors.

Adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system.

Specifications:

Colour: Brown

Viscosity: Smooth paste; holds peaks

Composition: MS Polymer

Application temperature: 5 to 30°C

Pack Sizes:

- 16kg Pail (10L)
- 600mL Sausage

Specific Gravity: 1.6 Approx.

Cure Rate: 2.5mm / 24hrs

Cure System: Moisture Cure

Full Cure: (1mm film) Approx. 18-24hrs Depending on temperature and relative humidity. Curing time extended in low humidity

Elongation: 300%

Walk on time: 16hrs – light traffic

Tack Free time: Approx. 1.25hrs @ 23°C 50% RH

Shore A Hardness: Approx. 50

Tensile Strength in Shear (2mm) Timber to Timber – BS EN 14293
1.3N/mm

Coverage: V3 Notch = 1.2-1.4m² / per litre V4 Notch = 1-1.2m² / per litre

Suitable For:

- Solid Timber
- Engineered Timber
- Parquetry
- Timber Stair Installs
- Hybrid & Laminate Stair Installs
- Plywood
- Rubber Underlay Matting
- Installing Trims



Bostik Ultraset 3in1 Acoustic Timber Flooring Adhesive 26kg

Bostik Ultraset 3 in 1 is a high performance flooring adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology is used in this formulation, maintaining the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives.

- 3 in 1 adhesive, moisture control and sound reduction membrane
- Thickness Control™ Spacer Technology maintains thickness between hardwood flooring and substrate
- Extremely low moisture vapour permeability
- Superior sound control typically outperforms 3mm rubber underlay
- 3mm Anti-fracture performance can bridge cracks up to
- Zero VOC (as calculated per SCAQMD Rule 1168)
- No restriction on board width or length
- Blockade® anti-microbial protection

Recommended Uses:

Suitable substrates include: concrete, terrazzo, ceramic tiles, timber, plywood and cement backer board- Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered flooring and bamboo flooring.

Coverage:

V4 Flat Notch (4.8mm) = 20-22m² @ 4.8mm Trowel Spread

V6 Notch Trowel (6mm) = 12-13m² @ 6mm Trowel Spread



WAKOL PU280 - Moisture Barrier - 1 Component Ready to use Full Membrane

Wakol PU 280 is a ready-to-use 1-component polyurethane primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for capillary ascending humidity and higher residual humidity up to 6 CM% / 98 corresponding RH % in cement screeds without floor heating, on heated cement screeds up to max. 3 CM% / 85 corresponding RH % as well as on concrete up to max. 7,5% by weight / 98 corresponding RH %; applicable as moisture barrier on unheated cement screeds and concretes without prior moisture measurement.

Suitable Applications:

Porous & NON-Porous Surfaces

- Concrete
- Screed
- Timber
- Plywood
- Tiles
- Most Surfaces

Coverage:

1 Coat @ 150µm wet film

- 5L Consumption = 45 m²
- 11L Consumption = 100-110 m²





DL55 Indoor Floor Self Levelling Compound 20kg

Description:

DL55 is an advanced cement and polymer based levelling and smoothing compound. DL55 is formulated for experienced commercial contractors to smooth and level large commercial and retail areas. Once dry it is suitable for the application of timber flooring, vinyl, carpet and tile floor finishes. Unlike normal hydration levellers, DL55 will harden and dry at temperatures down to 10°C.

Composition:

- Super smooth – requires no sanding
- Versatile – apply **1.5mm to 75mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application

Technical Data:

Compression Strength

After 1 Day Approx. 15MPa
After 7 Days Approx. 25MPa
After 28 Days Approx. 35MPa

Tensile Bending Strength

After 1 Day Approx. 5MPa
After 7 Days Approx. 7MPa
After 28 Days Approx. 10MPa

Colour: Grey

Water / Compound Ratio: 4.4L / 20kg bag

Working Time: 20-30 minutes

Pack-size: 20kg/bag

Coverage: Covers approx. 5m² at 3mm thick



DP70 Universal Porous & Non Porous Primer 5kg + 20kg Drums

Description:

Cemimax DP70 is a low emission, multi-purpose dispersion primer for for existing surfaces on **indoor & outdoor** applications. Use on surfaces with well-bonded, waterproof adhesive and smoothing compound residues.

Technical Data:

Packaging: Plastic bucket

Pack size:

- 5kg / 4L
- 20kg / 16L

Shelf-life: 12 months

Touch Dry Time: 15 -20min

Coverage: Approx. 12m² /1 Litre

Drying time: 4-6 hours

Suitable for CONCRETE, TIMBER, TILES, PLYWOOD, SLATE + more



DL59 Indoor + Outdoor Floor Premium Self Levelling & Overlayment Compound 20kg

Description:

DL59 is a cement based leveling compound with very high compressive strength to C40. DL59 is especially suitable for high traffic and heavy wear locations. DL59 can be also used as overlays for polished concrete. Suitable for all floor coverings

Composition:

- Super smooth – requires no sanding
- Extremely high strength of compression and bending
- Versatile – apply **1.5mm to 40mm** in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application
- Flexible – hand mix or pump application
- Can be polished
- Can add colours & aggregate to mix

Technical Data:

Compression Strength

After 1 day approx. 15MPa
After 7 days approx. 25MPa
After 28 days approx. 40MPa

Tensile Bending Strength

After 1 day approx. 5MPa
After 7 days approx. 7MPa
After 28 days approx. 10MPa

Colour: Grey

Water / Compound Ratio: 4.0L / 20kg Bag

Working Time: 20-30 minutes

Pack-size: 20kg/bag

Coverage: Covers approx. 5m² at 3mm thick



TILES



CONCRETE



TIMBER



OUTDOORS



WET AREAS



THOR FLOOR PROTECTION MATTING ROLLS

40metres x 750mm (30m2 Rolls)

form-A-guard is a triple layered, foam backed, nonabrasive surface protection product, which is suitable for protecting solid floors including polished timber, parquetry, vinyl, tiles, slate, marble and polished concrete (sealed only). The form-A-guard is also suitable for the protection of kitchen and bathroom sinks, bench tops, vanity basins, bath tubs and shower bases.

Also recommended for use with the form-A-guard, is the THOR Membrane Tape and Joining Tape. The THOR Membrane Tape is a low tack, clean release tape that can be applied directly to the perimeter of a cleaned surface area. It is advised that periodic checks should be conducted on the THOR Membrane Tape after 1 month of application to ensure clean removal.

DIMENSIONS:

Size: 750mm wide x 40m long , covers 30sqm



THOR JOINING TAPE

THOR printed Joining Tape has been specifically designed to safely join form-A-guard to secure and prevent movement whilst protecting your valuable surfaces. THOR Joining Tape offers a strong bond and as such should not be applied directly to any finished or polished surface.

**** THOR Joining Tape is not to be applied directly to any finished surface ****

DIMENSIONS:

Size: 48mm wide x 100metre long tape roll



THOR EDGE TAPE PRE-APPLICATION

THOR Pre-App PVC tape has been specifically designed for cured, sealed and finished solid surfaces such as walls, tiles, bench tops, engineered timber flooring etc. The Pre-App tape can also be used as a perimeter or a membrane tape.

FEATURES:

- Easy release
- Clean removal
- UV stabilised

DIMENSIONS:

Size: 48mm wide x 66metre long tape roll



ONE STOP SHOP FLOORING STORE



WHITE NON - MARKING
MALLET



TROWELS V3 + V4 + V6
TIMBER FLOORING



SAUSAGE GUNS 600ML



CLEANING WIPES
NON-SCRATCH



PRO CUTTING
TOOLS



STAND UP FLOOR
LEVELING TROWELS



HAND FLOOR
LEVELLING TROWELS



PULLING IRON



GAUGE RAKE FLOOR
LEVELLING



SKIRTING & MOULDING
REMOVAL



SPIKE ROLLER
FLOOR LEVELLING



DIY FLOOR
LAYING KIT



PVA 500ML T+G
FLOATING FLOOR GLUE



WAKOL MS335 REPAIR
HOLLOW SPOTS



SCRATCH REPAIR



DELUXE KNEE PADS

SHOP ONLINE: www.imperialflooringaustralia.com.au/shop



PRE-FABRICATED STAIR NOSINGS **SQUARE EDGE WITH OVERHANG**
ENGINEERED TIMBER FLOORING



PRE-FABRICATED STAIR NOSINGS **FLUSH BOX**
ENGINEERED TIMBER FLOORING



PRE-FABRICATED STAIR NOSINGS MATCHING COLOUR TO **HYBRID**
FLOORING OPTIONS



PRE-FABRICATED STAIR NOSINGS MATCHING COLOUR TO **LAMINATE**
FLOORING OPTIONS



CHAMPAGNE - C CHANNEL
END TRIM



SILVER - C CHANNEL
END TRIM



COLOUR MATCHING
- C CHANNEL END TRIM



BLACK - C CHANNEL
END TRIM



COLOUR MATCHING L
ANGLES - LAMINATE &
ENGINEERED



COLOUR MATCHING
L ANGLES - HYBRID



CHAMPAGNE - RAMP
REDUCER TRANSITION TRIM



SILVER - RAMP REDUCER
TRANSITION TRIM

PERIMETER EXPANSION GAP SCOTIA BEADINGS FIXED TO EXISTING OR NEW SKIRTING BOARDS



WHITE
SCOTIA



PALOMA OAK
SCOTIA



LIGHT OAK
SCOTIA



BROWN
SCOTIA



GREY
SCOTIA



NEW ENGLAND BLACKBUTT
SCOTIA



SANDSTONE
SCOTIA



SPOTTED GUM
SCOTIA



BLACK
SCOTIA









Sales Inquiries

Contact: 1300 676 176

Email: info@imperialflooringaustralia.com.au



HEAD OFFICE + SHOWROOM

2/25 Investigator Drive
Unanderra NSW 2526



Wollongong | Sydney | Melbourne

DISTRIBUTION CENTRES



IMPERIAL

FLOORING AUSTRALIA

WHOLESALE - COMMERCIAL - TRADE - RETAIL - DIY

FLOORING PACKAGES

www.imperialflooringaustralia.com.au